

M-1 GARAND

TM 9-1005-222-12

PLUS SUPPLEMENTAL MATERIAL FROM

TM 9-1005-222-35 and FM 23-5

Department of the Army Technical Manual

OPERATOR AND ORGANIZATIONAL
MAINTENANCE MANUAL INCLUDING
REPAIR PARTS AND SPECIAL TOOLS LIST

RIFLE, CALIBER .30 M 1

RIFLE, CALIBER .30 M 1C (Sniper's)
and

RIFLE, CALIBER .30 M 1D (Sniper's)

M -1 GARAND

HEADQUARTERS, DEPARTMENT OF THE ARMY, 17 March, 1969

Operator and Organizational Maintenance Manual

RIFLE, CALIBER .30: M 1, M 1C (Sniper's), M 1D (Sniper's)

Editor; Jeff Lesemann

Artist; Alan Longwith

Assistant Editor; Francois Rheault

This manual is current as of 2 December 1968

	Paragraphs	Page
PREFACE		3
INTRODUCTORY CHAPTER, "Origins and Development"		5
Chapter 1. INTRODUCTION		
Section I. General	1-1 - 1-3	13
II. Description and data	1-4, 1-5	13
Chapter 2. OPERATING INSTRUCTIONS		
Section I. Controls	2-1, 2-2	15
II. Operation under usual conditions	2-3 - 2-12	16
III. Operation of materiel used in conjunction with major item	2-13, 2-14	17
IV. Operation unusual conditions	2-15 - 2-20	17
Chapter 3. SERVICE AND MAINTENANCE INSTRUCTIONS		
Section I. Service upon receipt of materiel	3-1, 3-2	19
II. Repair parts, special tools and equipment	3-3 - 3-5	19
III. Lubrication instructions	3-6	20
IV. Preventive maintenance checks and services	3-7	20
V. Troubleshooting	3-8	21
VI. Operators maintenance procedures	3-9 - 3-11	24
VII. Organizational maintenance procedures	3-12 - 3-14	25
Chapter 4. MAINTENANCE OF MATERIEL USED IN CONJUNCTION WITH MAJOR ITEM	4-1	39
Chapter 5. AMMUNITION	5-1, 5-2	41
Chapter 6. DESTRUCTION OF MATERIEL TO PREVENT ENEMY USE	6-1	42
APPENDIX A. REFERENCES		42
APPENDIX B. ORGANIZATIONAL MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LIST		
Section I. Introduction		43
II. Basic issue items (Fig. 33,34)		46
III. Maintenance and operating supplies		46
IV. Prescribed load allowance		47
V. Repair Parts For:		
Trigger housing assembly (Fig. 35)		48
Barrel and receiver group (Fig. 36)		48
Telescope, M84 (Fig. 37)		49
Kit, winter trigger (Fig. 38, 39)		49
VI. Special Tools, test and support equipment (Fig. 33,34,40)		50
Appendix C. MAINTENANCE ALLOCATION CHART		
Section I. Introduction		56
II. Maintenance allocation chart for Rifle, Caliber .30 M1, M1C (Sniper's), and M1D (Sniper's)		57
ADDENDA SUPPLEMENTAL MATERIAL		58

*This manual supersedes TM 9-1005-222-12P/2, 11 August 1965 in its entirety.

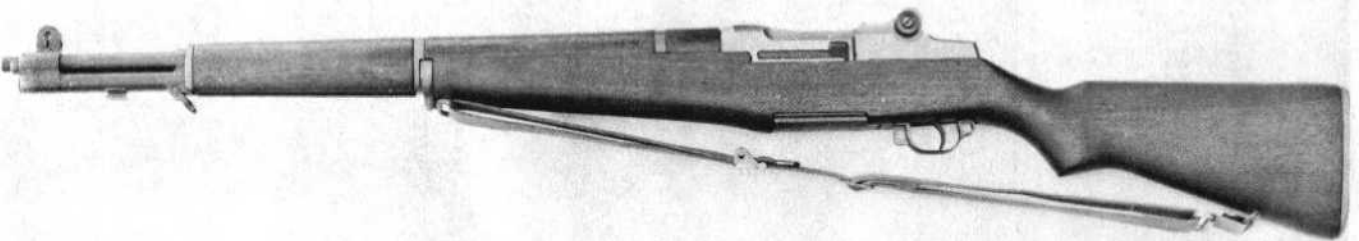
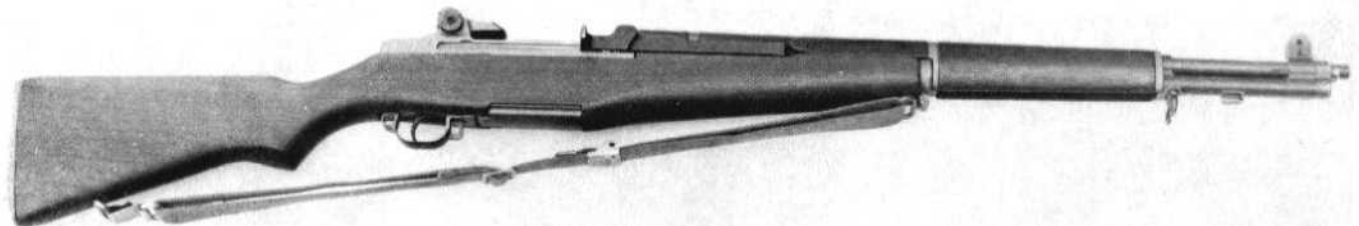


Figure 1. U.S. Rifle, Caliber .30, M 1

TM9-1005-222-12
Chapter 1
INTRODUCTION

Section I. General

1-1. Scope

These instructions are for use by the operator and organizational maintenance personnel. They apply to Caliber .30 Rifles, M1, M1C (Sniper's) and M1D (Sniper's).

1-2. Forms and Records

a. General. Refer to TM 38-750 (Army Equipment Records Procedure) for forms and records required.

b. Recommendations for Maintenance Manual Improvements. Report of errors, omissions, and recommendations for improving this publication by the individual user is encouraged. Reports should be submitted on DA Form 2028 (Recommended Changes to DA Publications) and forwarded direct to:

Commanding General
U.S. Army Weapons Command
ATTN: AMSWE-SMM-P
Rock Island, Illinois 61201

1-3. Administrative Storage

Refer to TM 740-90-1 for administrative storage.

Section II. DESCRIPTION AND DATA

1-4. Description

a. General. The Rifles, M1, M1C (Sniper's) and M1D (Sniper's) (figs. 1, 10 and 11) are clip-fed, gas-operated, air-cooled, semiautomatic shoulder weapons.

b. Differences in Models.

- (1) The M1C has a telescope mounted to the receiver.
- (2) The M1D has a telescope mounted to the barrel.
- (3) The M1C and M1D also require a flash hider and a cheek pad.

1-5. Tabulated Data

a. Rifle, M1.

Weight of rifle w/o equipment	9.5 lb. approx.
Weight of rifle w/bayonet	10.5 lb. approx.
Length of rifle	43 in.
Length of barrel	24 in.
*Muzzle velocity	2,750-2,800 fps
*Maximum effective range	500 yd.
*Maximum effective rate of fire (aimed rounds per minute)	16-24
*Number of cartridges in clip	8
*Types of ammunition	Ball, armor-piercing-incendiary, tracer, blank, rifle grenade cartridge and dummy

b. Rifles, M1C (Sniper's) and M1D (Sniper's).

Weight w/equipment (telescope, flash hider, gun sling, and cheek pad)	11.75 lb. approx.
Length of rifle w/flash hider, type T-37	46-1/8 in.

*This information also applies to the M1C and M1D Rifles.



Figure 10. U.S. Rifle, Caliber .30, M 1C (Sniper's), with flash hider, M 2. From the collection of Bill Douglas.

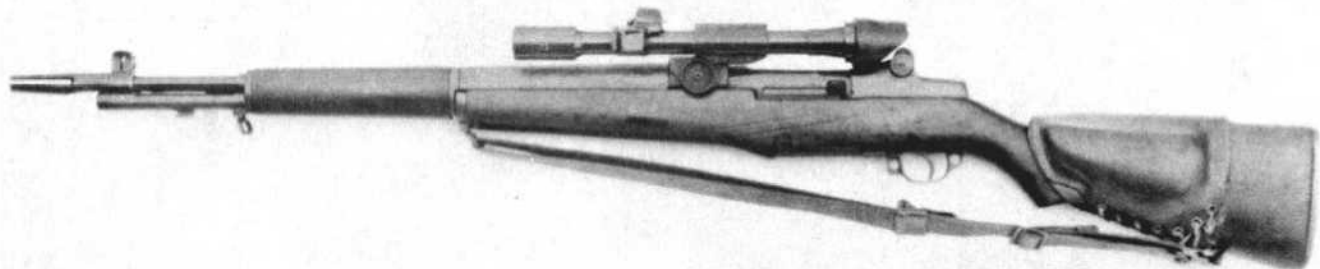


Figure 11. U.S. Rifle, Caliber .30, M 1D (Sniper's) with flash hider, T 37.

TM9-1005-222-12
Chapter 2
OPERATING INSTRUCTIONS
Section I. Controls

2-1. General

This section describes, locates, illustrates, and furnishes the operator with essential information pertaining to the various controls provided to properly operate the materiel.

2-2. Controls

Refer to table 2-1.

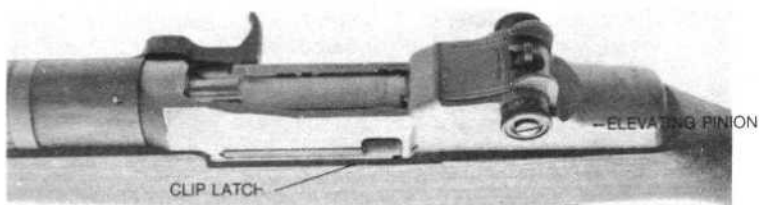


Figure 12. Controls.

Table 2-1. Controls

Item	(See fig. 12)	Purpose
Safety		To prevent accidental firing.
Trigger		To release hammer to effect firing.
Windage knob		To adjust lateral movement of rear sight.
Elevating pinion		To adjust elevation of aperture.
Clip latch		To hold clip in receiver until last round is fired.

Section II. OPERATION UNDER USUAL CONDITIONS

2-3. General

This section contains instructions for the operation of the rifles under conditions of moderate temperatures and humidity. Instructions for operation under unusual conditions are covered in section IV.

2-4. Preparation for Firing

- a. Examine bore. Make certain it is free of powder fouling or corrosion.
- b. Check gas cylinder lock screw for secure installation.
- c. Check ammunition. Make certain it is clean and that it is of the proper type and grade.
- d. Cock the rifle and place the safety in safe position (fig. 12).

2-5. Service Before Firing

Perform the before firing operations as indicated in table 3-3.

2-6. Loading

Refer to FM 23-5.

2-7. Zeroing

Refer to FM 23-5.

2-8. Misfire, Hangfire, and Cook-off

Refer to FM 23-5 and paragraph 2-9b, below.

2-9. Procedures for Removing a Round in Case of Failure to Fire

a. General After failure to fire, due to misfire, the following general precautions, as applicable, will be observed until the round has been removed from the weapon and the cause of failure determined.

- (1) Keep the weapon trained on the target and see that all personnel are clear of the muzzle.
- (2) Before retracting the bolt and removing the round, see that personnel, not required for operation, are cleared from vicinity.
- (3) Make certain the round, removed from the weapon, is kept separate from other rounds until it has been determined whether the round or weapon is at fault. If the weapon is determined to be at fault, the round may be reloaded.

b. Time Intervals. The definite time intervals for waiting, after failure of weapon to fire, are prescribed as follows: Always keep the round in the chamber for five seconds from the time a misfire occurs to insure against an explosion outside of the gun in event a hang-fire develops. If the barrel is hot and a misfire stops operation of the gun, wait five seconds with the round locked in the chamber to insure against hangfire dangers (a hangfire will occur within five seconds after the primer is struck), then extract the round immediately to prevent cook-off. If the round cannot be extracted within an additional five seconds, it must remain locked in the chamber for five minutes because of the possibility of a cook-off. Also in the event the barrel is hot and misfire occurs when attempting to resume firing after an intentional cessation of firing, the round should remain locked in the chamber for five minutes because of the possibility of a cook-off.

2-10. Service During Firing

Perform the during firing operations as described in the operators preventive-maintenance services (table 3-3).

2-11. Unloading

Refer to FM 23-5.

2-12. Service After Firing

Perform the after firing operations as described in the operator's preventive-maintenance services (table 3-3).

Section III. OPERATION OF MATERIEL USED IN CONJUNCTION WITH MAJOR ITEM

2-13. General

The following materiel is not normally used continually. Therefore, it is necessary to protect from weather and dampness in storage. Clean and lubricate materiel as required, whether in use or in storage.

2-14. Equipment

- a. **Grenade Launcher, M7A3 and Grenade Launcher Sight, M15.** Refer to FM 23-30.
- b. **Bayonet-Knife, M5 and M5A1 and Bayonet-Knife Scabbard, M8A1.** Keep bayonet in scabbard except when removed for training, inspections, cleaning, repair, or for use in combat or danger zones.
- c. **Winter Trigger Kit.** Use the winter trigger kit only in extreme cold operation and on authority of unit commander.

Section IV. OPERATION UNDER UNUSUAL CONDITIONS

2-15. General

Report any chronic failure of materiel resulting from subjection to extreme conditions (par 1-2).

2-16. Operation in Extreme Cold

- a. In climates consistently below 0°F, it is necessary to prepare the rifle for cold-weather operation. The rifle should be thoroughly cleaned with SD, dry cleaning solvent, and lubricated with LAW, weapons lubricating oil.
- b. Rifles should be free of moisture and excess oil. Moisture or too much oil on the working parts will cause them to be sluggish in operation, or perhaps to fail completely.
- c. Exercise moving parts through their entire range at required intervals. This movement helps prevent parts from freezing in place and reduces effort required to operate them.
- d. Materiel not in use and stored outside must be protected with proper cover.

Note. Transferring weapon from cold to warm air may cause moisture to collect. If the weapon is brought into a warm room, allow it to reach room temperature before cleaning and lubricating as required.

2-17. Operation in Extreme Heat

a. Hot, Dry Climates.

(1) The film of oil necessary for operation and preservation dissipates quickly in hot climates. Inspect the rifle, paying particular attention to all hidden surfaces such as bolt and lug, operating rod and recess, cam surfaces and bolt locking recess in receiver, where corrosion might occur and not be quickly noticed.

(2) Perspiration from the hands contributes to rusting because it contains acids and salts. After handling materiel, clean, wipe dry, and restore the oil film using PL special, general purpose lubricating oil.

- (3) Clean and oil the bore more frequently than usual.
- (4) Apply linseed oil to wooden parts to prevent drying.

b. Hot, Damp, and Salty Atmosphere.

- (1) See a(1) and (2) above under hot, dry climates.
- (2) Inspect materiel frequently because of increased possibility of rust.
- (3) When materiel is active, clean and lubricate the bore and exposed metal surfaces more frequently than prescribed for normal service.
- (4) Moist and salty atmosphere tend to emulsify oils and greases and destroy their rust-preventive qualities. Inspect all parts frequently for corrosion.
- (5) When materiel is inactive, cover metal surfaces with a film of PL special, general purpose lubricating oil.
- (6) Apply linseed oil to wooden parts to keep out moisture.

2-18. Operation in Dusty or Sandy Areas

a. Clean and lubricate the materiel more frequently in sandy or dusty areas. Exercise particular care to keep sand out of mechanisms when carrying out inspecting and lubricating operations. Shield parts from flying sand with tarpaulins during disassembly and assembly operations.

b. Before operating in sandy areas, remove lubricant from bolt, barrel and receiver, operating rod, and trigger housing assembly, as they will pick up sand and from an abrasive which will cause rapid wear. Dry surfaces wear less than surfaces coated with lubricants contaminated with sand. Clean and lubricate all exposed parts after action is over.

2-19. Hand-Carried Fording

- a. No special lubrication is required before fording.
- b. Protect from water splashes.
- c. If immersion does occur, proceed as directed in paragraph 2-20.

2-20. Maintenance After Immersion

a. **General.** During hand-carried fording, water seepage into bolt, trigger housing, receiver, and operating rod assembly will usually occur. It is advisable, therefore, that the service outlined below be accomplished on all weapons submerged in water as soon as practical to prevent damage to the weapon.

b. Procedures.

- (1) After submersion in salt water, wash in clear water to remove corrosive salts.
- (2) Drain all trapped moisture and wipe dry.
- (3) Assemblies which require disassembly for proper lubrication must be disassembled, dried, and lubricated as soon as possible.

Note. Items not authorized for operator disassembly/assembly must be cleaned by organizational maintenance personnel.



Figure 13. U.S. Rifle, Caliber .30, M 1. Major assembly group.

Chapter 3

SERVICE AND MAINTENANCE INSTRUCTIONS**Section I. Service Upon Receipt of Materiel****3-1. General**

a. When a new or reconditioned Rifle, M1, M1C (Sniper's) or M1D (Sniper's) is received, it is the responsibility of the officer in charge to determine whether the materiel has been properly prepared for service by the supplying organization and to be sure it is in condition to perform its function.

b. All basic issue items will be checked with the listing in appendix B.

c. A record will be made of all missing parts, tools, and equipment, and of any malfunctions. Corrective action should be initiated as soon as possible.

3-2. Services

Refer to table 3-1 for services performed on receipt of materiel.

Table 3-1. Service upon Receipt of materiel

Step	Action	Reference
RIFLES		
	<i>Note.</i> When new rifles are received, they are sealed in vapor proof, volatile corrosion inhibitor (VCI) bags. They are packed two in a carton and five cartons in a box.	
1	Remove carton from box and rifle from carton and bags.	
2	Check for missing items. <i>Note.</i> Items must agree with Basic issue items list.	App B, Sec II
3	Clean and lubricate bore and chamber.	Par 3-11a and 3-6
4	Field strip and inspect for missing parts and proper assembly.	FM 23-5
5	Clean and lubricate the following: Locking lugs of bolt Bolt guides Camming surfaces of operating rod	Par 3-11a and 3-6
6	Perform "before operation" preventive maintenance checks and services.	Table 3-3

Section II. REPAIR PARTS, SPECIAL TOOLS AND EQUIPMENT**3-3. Tools and Equipment**

Tools and equipment issued with the Caliber .30 Rifles, M1, M1C (Sniper's) and M1D (Sniper's) are listed in the basic issue items list, appendix B.

3-4. Special Tools and Equipment

Special tools and equipment are listed and illustrated in appendix B.

3-5. Maintenance Repair Parts

Organizational maintenance repair parts are listed and illustrated in appendix B.

Section III. LUBRICATION INSTRUCTIONS

3-6. General

a. Make certain all metal parts have been cleaned with SD, dry cleaning solvent. Dry thoroughly. Apply a light coat of preservative, PL special, general purpose lubricating oil, for above 0°F, and LAW, weapons lubricating oil, for below 0°F. Apply a light coat of rifle grease to the following surfaces:

- (1) Locking lugs of bolt, operating lug, and recesses.
- (2) Bolt guide.
- (3) Cams on trigger and hammer.

b. Refer to table 3-2 for a listing of lubrication and cleaning materials and stock numbers for requisitioning purposes.

c. Refer to paragraph 2-16 thru 2-20 for specific lubrication instructions under unusual conditions.

Table 3-2. materials Required for Maintenance Functions

Federal stock number	Item
8020-244-0153	BRUSH, ARTISTS: metal, ferrule, flat, chisel edges, 7/16 lg. exposed bristle
7920-295-2491	BRUSH, CLEANING, TOOL AND PARTS: rd, 100 percent tampico fiber.
6850-965-2332	CARBON REMOVING COMPOUND: (P-C-111) (5 gal. pail)
6850-224-6656	CLEANING COMPOUND, RIFLE BORE: (CR)
6850-224-6657	2 oz. can
6850-224-6658	6 oz. can
5350-221-0872	1 qt. can
6850-281-1985	CLOTH, ABRASIVE: crocus, ferric oxide and quartz, jean-cloth-backing, closed-coating. (CA)
9150-273-2389	DRY CLEANING SOLVENT: (SD) (1 gal can)
9150-231-6689	LUBRICATING OIL, GENERAL PURPOSE: (PL special)
9150-754-0063	4 oz. can
8010-221-0611	1 qt. can
9150-292-9689	GREASE, RIFLE: (1 lb. can)
7920-205-1711	LINSEED OIL, RAW: (1 gal. can) (TT-L-00215)
	LUBRICATING OIL, WEAPONS: (LAW) for below zero operations (1 qt. can)
	RAG, WIPING: cotton (50 lb. bale)

Section IV. PREVENTIVE MAINTENANCE CHECKS AND SERVICES

3-7. Preventive Maintenance

a. **Purpose.** To assure maximum operational readiness the operator must perform certain scheduled maintenance services at designated intervals. See basic preventive maintenance procedures (1) thru (3) under b below, and table 3-3.

b. Preventive Maintenance Performed by Operator.

(1) Rust, dirt, grit, gummed oil, and water cause rapid deterioration of outer surfaces and internal mechanisms. Exercise care to keep all surfaces clean and properly lubricated. Exterior surfaces of the weapon (or components) are not to be cleaned or polished with treated cloths or other commercial compounds.

(2) Tighten loose parts.

(3) Every six months check to see if all modifications have been applied. Refer to DA Pam 310-7. No alteration or modification will be made except as authorized by modification work order.

Table 3-3. Preventive maintenance Checks and Services

Item Number	Interval				B—Before operation D—During operation	A—After operation W—Weekly	Reference
	Operator Daily			Org.			
	B	D	A				
					Item to be inspected	Procedure	
1	1	—	—	—	M1, M1C, M1D	Hand cycle the action to insure binding is not present.	Fig. 12
2	2	—	—	—	Trigger housing assembly	Actuate safety. Safety will not engage when hammer is forward.	
3	3	—	—	—	Barrel and receiver	Actuate windage knob and elevating pinion of rear sight group for proper operation. Aperture must retain position against thumb pressure.	Fig. 12
4	4	—	—	—	Barrel and receiver	Check front sight for secure installation.	Par 3-11a Par 3-6
5	—	5	—	—	M1, M1C, M1D	Check gas cylinder lock screw for secure installation. Note. Do not tighten lock screw when weapon is hot.	
6	—	—	6	—	M1, M1C, M1D	Clean chamber, bore, and all components.	
7	—	—	7	—	M1, M1C, M1D	Lubricate.	

Section V. TROUBLESHOOTING

3-8. General

Refer to table 3-4 for troubleshooting.

Table 3-4. Troubleshooting

MALFUNCTION	PROBABLE CAUSE	CORRECTIVE ACTION	
		OPERATOR	ORGANIZATIONAL
Failure to load	Damaged clip	Replace clip.	
	Improperly assembled receiver components	Disassemble, and reassemble correctly (refer to FM 23-5).	
Failure to feed	Weak or broken operating rod spring	-----	Replace spring (2, fig. 36).
	Binding or damaged operating rod	-----	Evacuate to direct support maintenance personnel.
Bolt fails to close	Dirty or deformed ammunition	Clean or replace ammunition.	
	Cartridge case holding bolt out of battery	Pull bolt to the rear and remove dirty or deformed cartridge.	
	Dirty chamber	Clean chamber (par 3-11a).	
	Extractor does not snap over rim of cartridge	Clean bolt assembly and extractor recess (par 3-11a).	Replace extractor (5, fig. 36).
	Frozen ejector spring and plunger	-----	Replace ejector (6, fig. 36).
	Restricted movement of or damaged operating rod	-----	Evacuate to direct support maintenance personnel.
	Weak or broken operating rod spring	-----	Replace spring (2, fig. 36).
	Damaged receiver	-----	Evacuate to direct support maintenance personnel.
Failure to fire	Bolt not in battery	See "bolt fails to close".	
	Defective ammunition	Follow procedures for misfires (refer to FM 23-5).	
	Firing pin worn, damaged, or movement restricted	-----	Replace firing pin (8, fig. 36).
	Inadequate firing pin protrusion	-----	Evacuate to direct support maintenance personnel.
	Weak or broken hammer spring	-----	Replace hammer spring (4, fig. 35).

	Hammer damaged or broken	Evacuate to direct support maintenance personnel	
Short recoil	Gas cylinder lock screw loose	Tighten lock screw (15, fig. 36).	Replace if necessary (15, fig. 36).
	Gas cylinder lock not fully seated	Tighten gas cylinder lock (16, fig. 36).	
	Carbon or foreign matter in gas cylinder or barrel port	Clean (par 3-11a).	
	Defective operating rod spring		Replace spring (2 fig. 36).
	Gas cylinder not fully seated		Remove and properly install gas cylinder (figs. 22, 23)
	Improper lubrication in cold weather	Clean and lubricate properly (par 2-16).	
	Unserviceable gas cylinder		Evacuate to direct support maintenance personnel.
	Unserviceable gas piston		Evacuate to direct support maintenance personnel.
Failure to extract	Cartridge seized in chamber	Remove cartridge and clean chamber (par 3-11a).	
	Damaged or deformed extractor		Replace extractor (5, fig. 36).
Failure to eject	Ruptured cartridge case		Remove cartridge case fig. 14).
	Short recoil	See "short recoil".	
	Weak, frozen or distorted ejector spring and plunger		Replace ejector (6, fig. 36).
Failure of bolt to be held rearward after last round is fired	Insufficient rearward movement of bolt	See "short recoil".	
	Defective or broken operating rod catch		Evacuate to direct support maintenance personnel.
	Defective operating rod.		Evacuate to direct support maintenance personnel.
Failure of clip to eject	Broken or deformed latch spring		Replace latch spring (27, fig. 36).



Figure 14. Removal of ruptured cartridge case.

Section VI. OPERATORS MAINTENANCE PROCEDURES

3-9. Removal/Installation of Major Groups and Assemblies

Refer to FM 23-5. Also see fig. 13 and fig. 15.

3-10. Disassembly/Assembly Barrel and Receiver Group

Refer to FM 23-5. Also see figs. 20 through 30.

3-11. Cleaning, Inspection, and Repair

a. Cleaning.

(1) General.

(a) Immediately after firing, thoroughly clean bore with a bore brush saturated with CR, rifle bore cleaning compound.

(b) After cleaning with CR, run dry swabs thru the bore until the swabs are clean. Make certain that no trace of burned powder or other foreign substances are left in bore. Then apply a light coat of PL special, general purpose lubricating oil.

(c) Clean the chamber with a cleaning brush dipped in CR.

(d) Clean all surfaces exposed to powder fouling (bolt face, chamber, piston area of operating rod assembly and gas cylinder lock screw) with CR.

Note. This compound is not a lubricant. Wipe dry and oil all parts which require lubrication.

CAUTION. The use of abrasives, steel wool, wire brushes, or scrapers on the piston area of the operating rod assembly will change critical dimensions that may cause the weapon to malfunction and is therefore prohibited. The application of lubricants to this area is also prohibited.

(e) For general usage, SD, dry cleaning solvent, may be used to clean or wash grease and oil from all parts of the rifle.

(2) General precautions in cleaning.

(a) SD, dry cleaning solvent, is flammable and should not be used near an open flame. Have fire extinguishers available when using this material. This solvent evaporates quickly and has a drying effect on the skin. If used without gloves it may cause cracks in the skin; in some individuals, mild irritation or inflammation may develop. Use only in well-ventilated areas.

(b) The use of gasoline, kerosene, benzene (benzol) or high-pressure water, steam, or air, for cleaning the weapon is prohibited.

(c) Do not dilute CR, rifle bore cleaning compound. Do not add antifreeze. Store cleaner in a warm place. Shake CR well before using.

(3) **Cleaning of sling and scabbard.** Clean mildewed canvas by scrubbing with a dry brush. If water is necessary to remove dirt, it must not be used until mildew has been removed. Oil and grease may be removed by scrubbing with issue soap and water. Rinse well with water and dry.

CAUTION. At no time is gasoline or any solvent to be used to remove oil or grease from canvas.

To prevent mildew, air canvas items frequently.

(4) **Cleaning.** Clean with a dry cloth. Periodically rub raw linseed oil on wooden components to prevent drying or the absorption of moisture.

CAUTION. Do not apply linseed oil to those surfaces next to the barrel. Application of oil to these surfaces creates heavy smoking when the barrel is hot. This smoke will obscure the operator's vision. Portions which swell due to high moisture content should be dried before applying the linseed oil. Do not allow linseed oil to contact or remain on metal parts.

b. **Inspection.** Refer to paragraph 3-7.

c. **Repair.** Turn rifle into organizational maintenance personnel for any necessary repair.

Section VII. ORGANIZATIONAL MAINTENANCE PROCEDURES

3-12. Removal/Installation of Major Groups and Assemblies

Refer to FM 23-5.

3-13. Disassembly/Assembly of Major Group and Assemblies

Refer to figures 15 through 30, 35, 36 and 41.

NOTE. White dots indicate disassembly, and black dots indicate assembly.

3-14. Cleaning, Inspection, and Repair

a. Cleaning.

(1) **General.** Refer to paragraph 3-11a for general cleaning procedures.

(2) Removing carbon. On component parts which have a hard carbon residue it may be necessary to clean these parts with P-C-111, carbon removing compound. Observe the following procedures when using P-C-111.

WARNING. Avoid contact of P-C-111 with skin. If contact does occur, wash compound off thoroughly with running water. A good lanolin base cream is helpful if applied after washing off compound. Recommend use of gloves and protective equipment.

(a) Using a suitable container, fill with fresh compound.

(b) Before soaking a component in compound, remove all grease, dirt and oil as indicated in paragraph 3-11a. Place parts to be cleaned in a container and make certain they are completely immersed.

(c) Soak for 2 to 16 hours as necessary. Remove parts and drain. Rinse with water or solvent. To effectively remove carbon, brush with a stiff bristle brush (not wire) under running water.

(d) Wipe parts dry and lubricate (par 3-6).

b. Inspection and Repair.

Refer to table 3-5.

NOTE. For items not authorized at organizational maintenance level, evacuate to direct support maintenance personnel.

Table 3-5. Organizational Maintenance Functions

Warning: Before starting an inspection, be sure to clean the weapon. Do not actuate the trigger until the weapon has been cleared. Inspect the chamber to insure that it is empty, and check to see that no ammunition is in position to be introduced.

ITEM	INSPECTION AND REPAIR
Trigger housing assembly	Inspect for and remove burs. Replace items 1, 2, 4, 6, 8, and 10, Fig. 35, if worn or damaged.
Stock assembly	Inspect for cracks, breakage, or damage that would weaken the stock. Evacuate to direct support maintenance personnel. Check for dry, unoiled areas of wood. Oil with raw linseed oil only. Do not oil inside of stock. Make certain that the butt plate assembly is secure to the stock.
Barrel and receiver group	Inspect barrel for rust or obstructions in bore and remove. Inspect for and remove burs. Inspect chamber for ruptured cartridge. Remove with the ruptured cartridge case extractor.
Operating rod assembly group	Inspect for damage that may restrict movement of operating rod assembly. Replace item 2, fig 36, if weak, broken, or kinked.
Bolt assembly	Inspect for and remove burs. Inspect firing pin. If chips or cracks are present in tip area, or if badly worn, replace. Inspect ejector and spring assembly hole for distortion, burs or rust that would hinder free movement of the ejector assembly. Replace items 5, 6, 7, and 8, fig 36, if worn or damaged.
Follower group	Replace item 10, fig 36, if worn or damaged.
Gas cylinder group	Inspect front sight. make sure it is secure. Inspect gas cylinder lock screw. Make sure it is tight, but not "frozen" or cross-threaded in gas cylinder. Replace items 15, 18, and 19 fig 36, if worn or damaged.
Handguard group	Inspect for cracks that would impair serviceability. Replace items 20, 21, and 22, fig 36, if damaged. Note. Evacuate damaged handguards to direct support maintenance personnel for repair. Inspect for damaged parts. Replace item 27, fig 36, if worn or damaged.
Rear sight group	Inspect for damaged parts. Inspect windage knob and pinion for binding. Replace items 28, 29, and 30, fig 36, if worn or damaged. Raise the aperture to full height and reduce by four clicks. Grasp the rifle at the small of the stock with the thumb on the aperture. Press down on aperture. Aperture should not move under thumb pressure.
Assembled rifle	Hand operate to assure proper functioning.

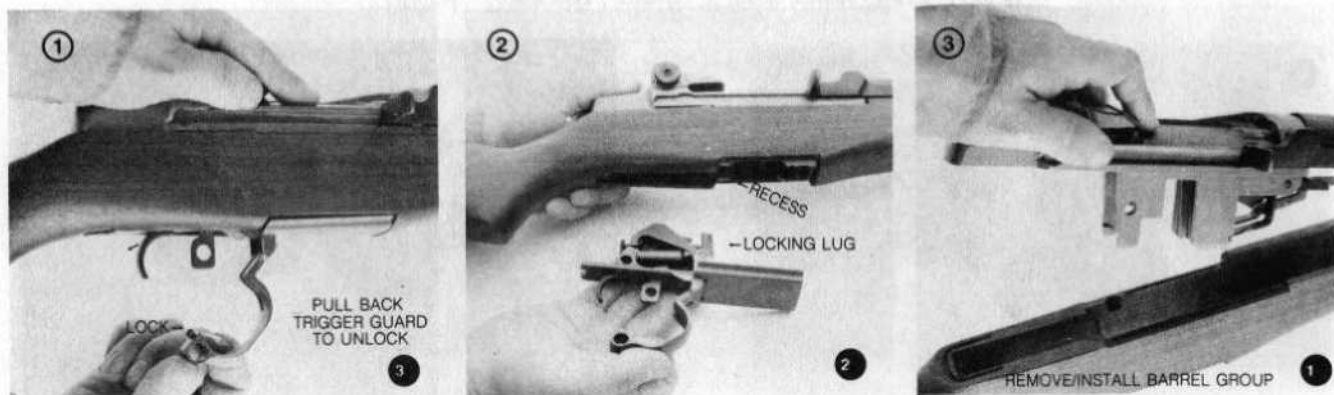


Figure 15. Removal / installation of major groups and assemblies.


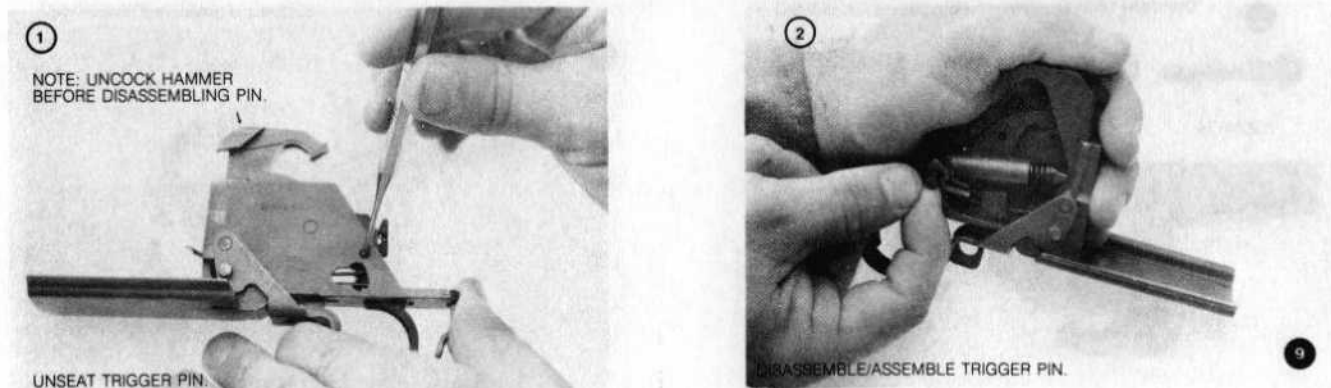



Figure 16. Disassembly / assembly of trigger housing assembly (1 of 4).



DISASSEMBLE/ASSEMBLE TRIGGER

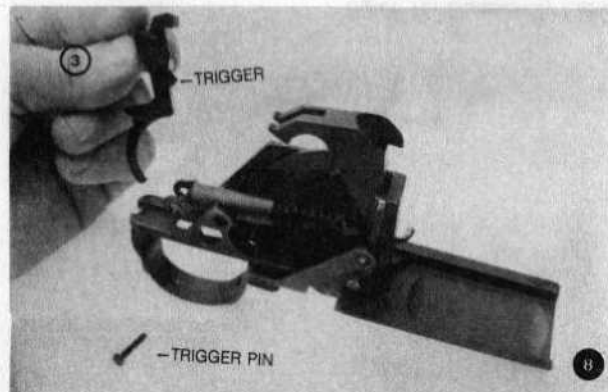

DISASSEMBLE/ASSEMBLE HAMMER SPRING HOUSING,
HAMMER HELICAL COMPRESSION SPRING AND
HAMMER SPRING PLUNGER.

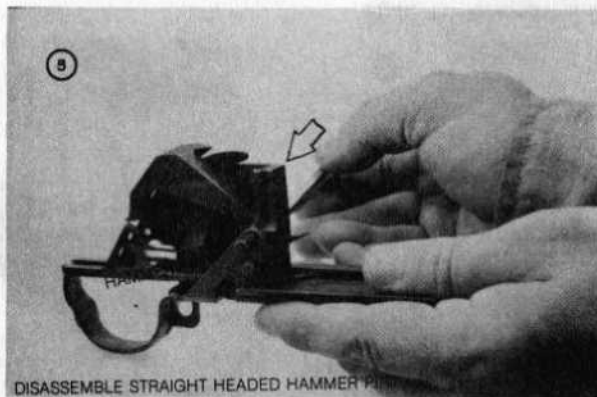


DISASSEMBLE STRAIGHT HEADED HAMMER PIN



ASSEMBLE STRAIGHT HEADED HAMMER PIN.


Figure 17. Disassembly / assembly of trigger housing assembly (2 of 4).

6

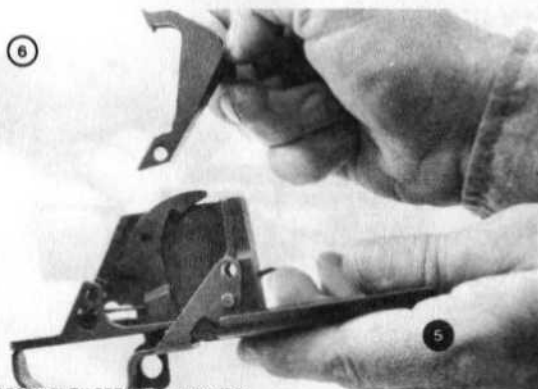


DISASSEMBLE/ASSEMBLE HAMMER.

7

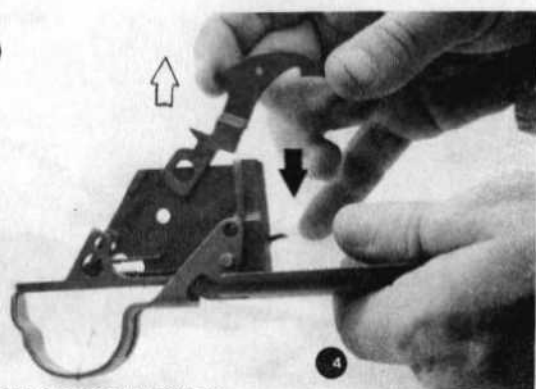

DISASSEMBLE/ASSEMBLE SAFETY.

8

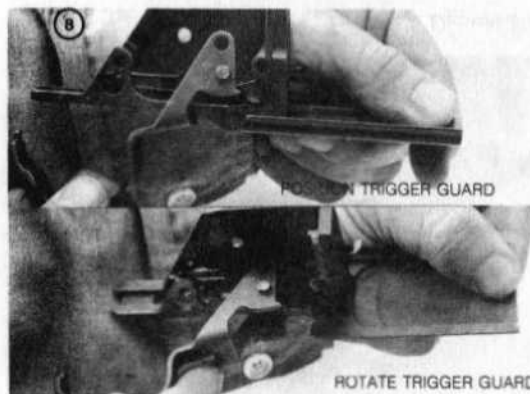


POSITION TRIGGER GUARD

ROTATE TRIGGER GUARD

DISASSEMBLE/ASSEMBLE TRIGGER GUARD.

3

9

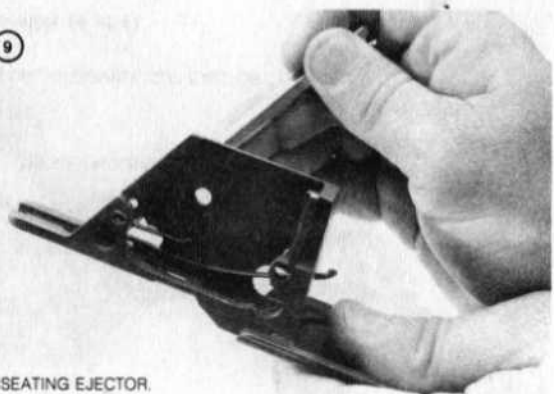

UNSEATING EJECTOR.

Figure 18. Disassembly / assembly of trigger housing assembly (3 of 4).

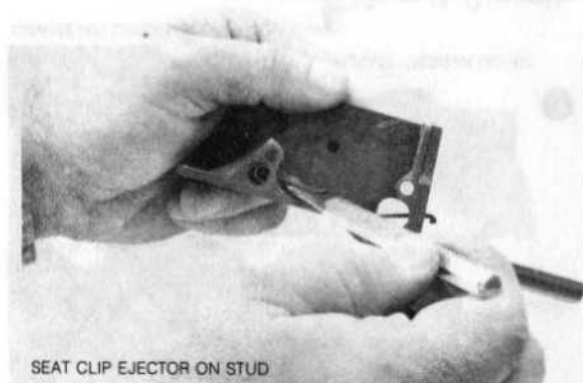



Figure 19. Disassembly / assembly of trigger housing assembly (4 of 4).



Figure 20. Removal / installation of bolt assembly.

DISASSEMBLY: PLACE TOOL IN BOLT AS SHOWN. APPLY PRESSURE AND TURN CLOCKWISE TO REMOVE EXTRACTOR. NOTE: BE CAREFUL TO PREVENT SPRING AND PLUNGER ASSEMBLIES FROM FLYING.

①

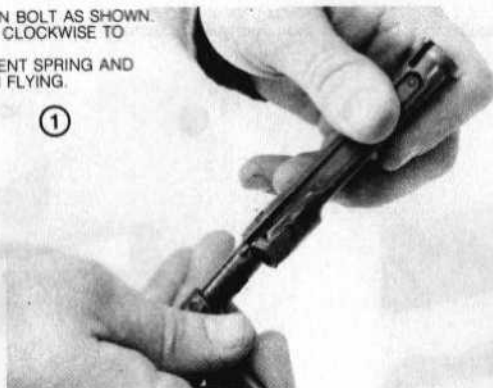


ASSEMBLY: HOLD BOLT IN HAND WITH THUMB ON EXTRACTOR. PLACE TOOL SO GROOVE IS OVER EJECTOR AND COMPRESS EJECTOR AND SPRING INTO BOLT. PUSH EXTRACTOR IN PLACE WITH THUMB.

④


DISASSEMBLE/ASSEMBLE EXTRACTOR WITH COMBINATION TOOL

②

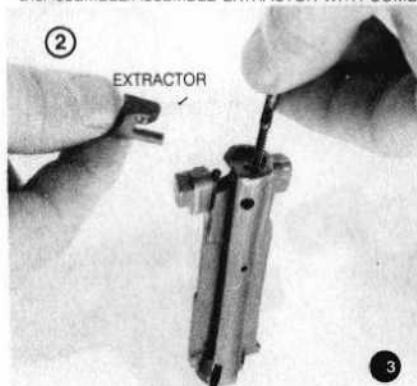

DISASSEMBLE/ASSEMBLE EXTRACTOR AND CARTRIDGE EJECTOR.


③

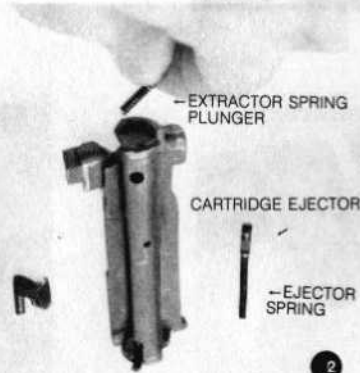

DISASSEMBLE/ASSEMBLE EXTRACTOR SPRING PLUNGER.

②

④

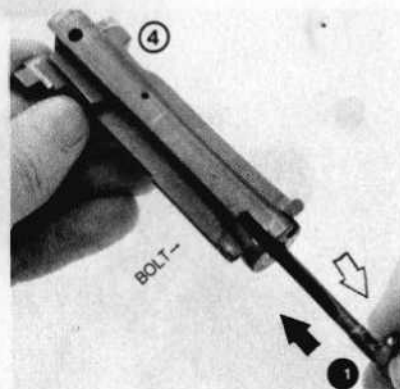

DISASSEMBLE/ASSEMBLE FIRING PIN.

①

Figure 21. Disassembly / assembly of bolt assembly.




Figure 22. Disassembly / assembly of gas cylinder group (1 of 2).




Figure 23. Disassembly / assembly of gas cylinder group (2 of 2).




Figure 24. Removal / installation of operating rod assembly.

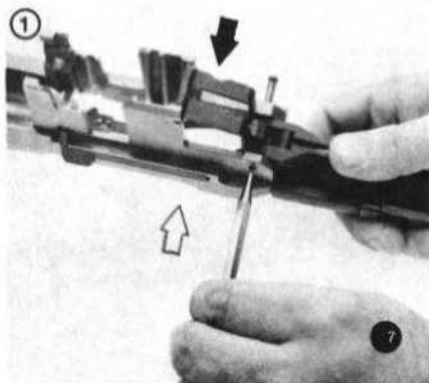

DISASSEMBLE/ASSEMBLE SHOULDER HEADED PIN.

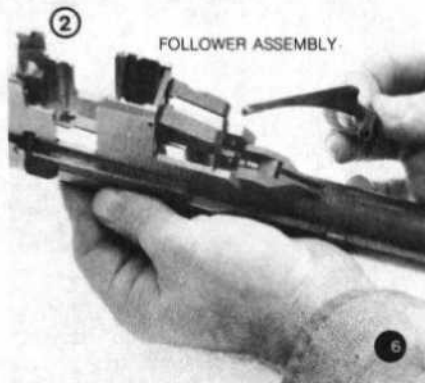


DISASSEMBLE/ASSEMBLE FOLLOWER ARM.

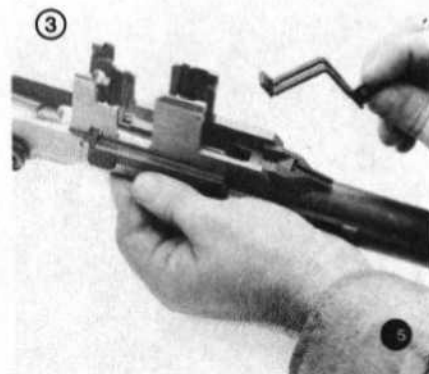


DISASSEMBLE/ASSEMBLE BULLET GUIDE.



REMOVE/INSTALL OPERATING ROD CATCH

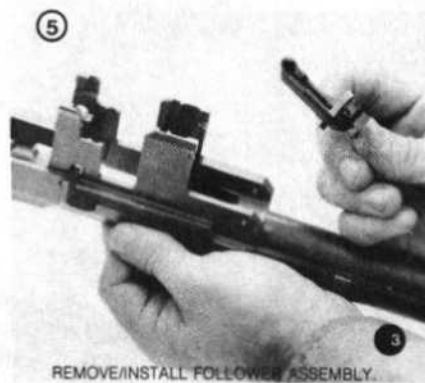


REMOVE/INSTALL FOLLOWER ASSEMBLY.

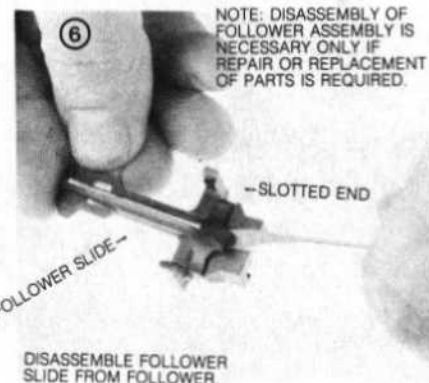


DISASSEMBLE FOLLOWER SLIDE FROM FOLLOWER.

Figure 25. Disassembly / assembly of magazine follower group (1 of 2).


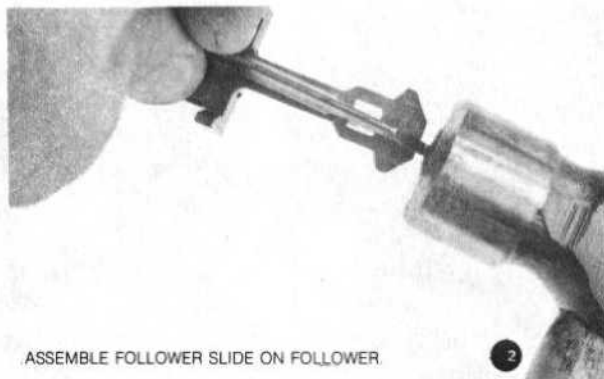


ASSEMBLE FOLLOWER SLIDE ON FOLLOWER.

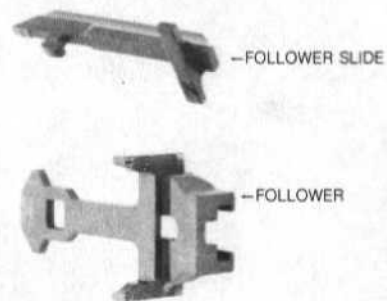


FOLLOWER SLIDE AND FOLLOWER DISASSEMBLED.

⑦ DISASSEMBLE/ASSEMBLE
OPERATING ROD CATCH ASSEMBLY.

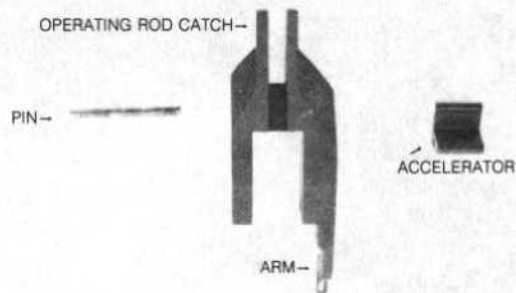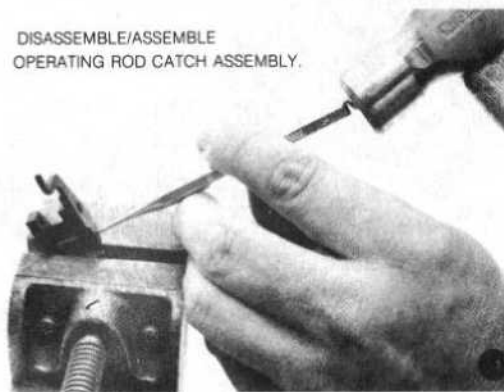


OPERATING ROD CATCH ASSEMBLY DISASSEMBLED


Figure 26. Disassembly / assembly of magazine follower group (2 of 2).

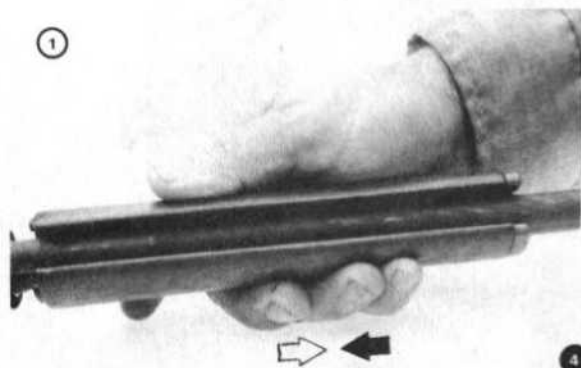


DISASSEMBLE/ASSEMBLE FRONT HAND GUARD

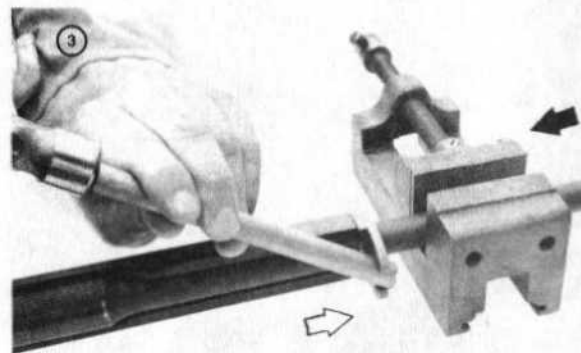

LOOSEN/TIGHTEN BAND

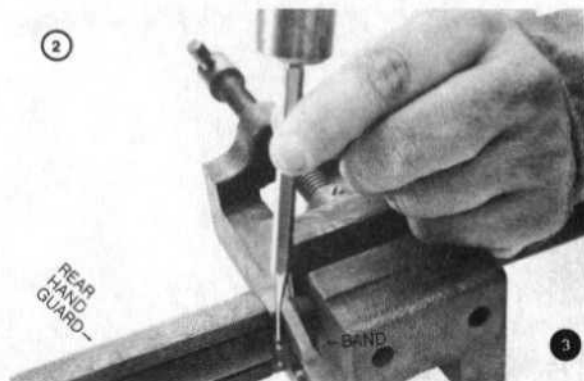

DISASSEMBLE/ASSEMBLE SPRING PIN

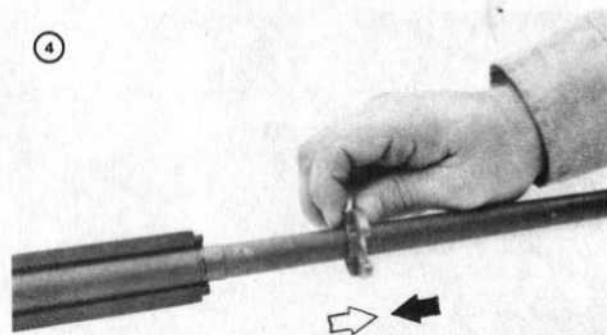

DISASSEMBLE/ASSEMBLE BAND

Figure 27. Disassembly / assembly of handguard group (1 of 2).

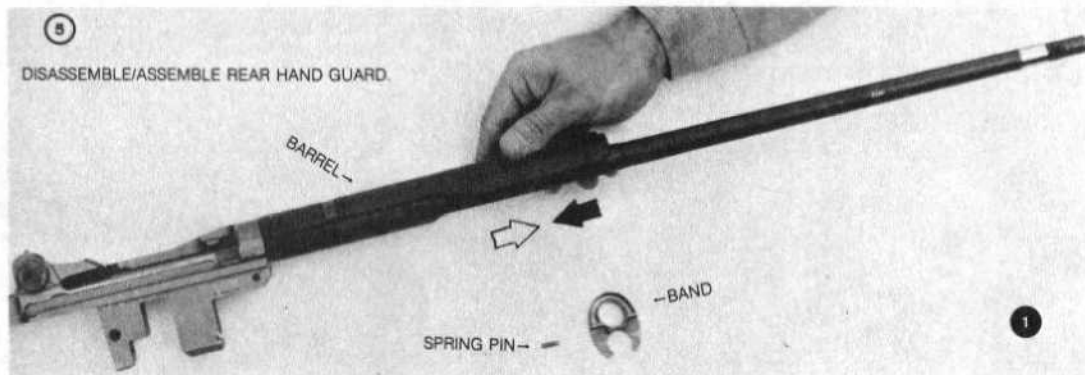


Figure 28. Disassembly / assembly of handguard group (2 of 2).



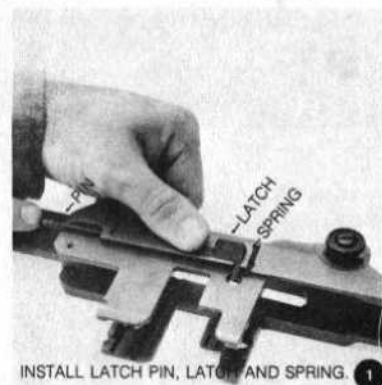



Figure 29. Disassembly / assembly of latch group.

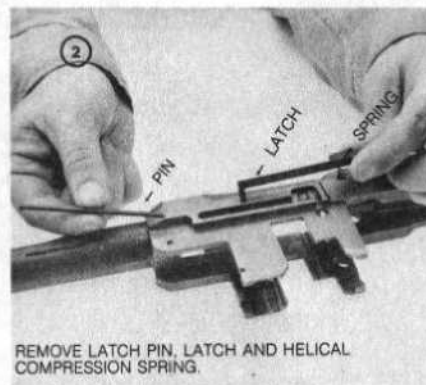


LOOSEN/TIGHTEN NUT.

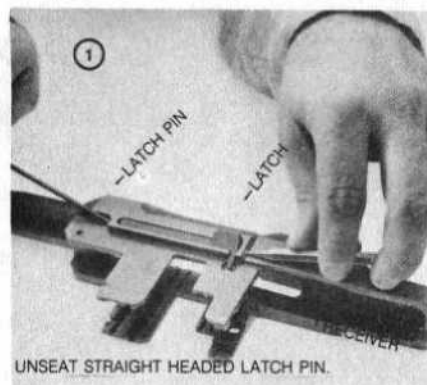


DISASSEMBLE/ASSEMBLE WINDAGE KNOB.

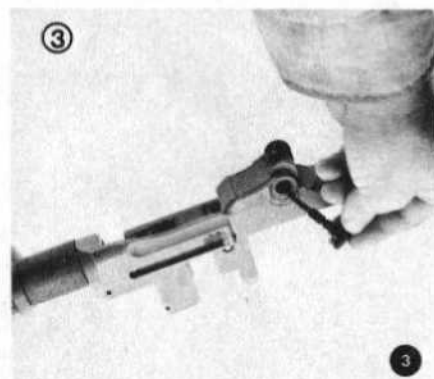


DISASSEMBLE/ASSEMBLE ELEVATING PINION.

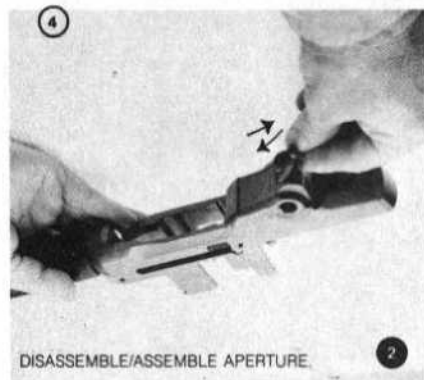

DISASSEMBLE/ASSEMBLE APERTURE.

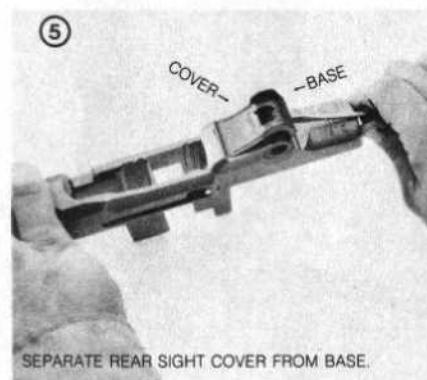

SEPARATE REAR SIGHT COVER FROM BASE.

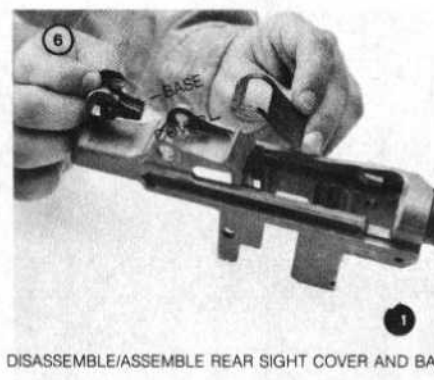

DISASSEMBLE/ASSEMBLE REAR SIGHT COVER AND BASE.

Figure 30. Disassembly / assembly of rear sight group.

TM9-1005-222-12

Chapter 4

**MAINTENANCE OF MATERIEL USED
IN CONJUNCTION WITH MAJOR ITEM**

4-1. General

Refer to table 4-1.

Table 4-1. Maintenance of Equipment

Item	Maintenance function	
	Operator's maintenance	Organizational maintenance
Grenade Launcher, M7A3	Remove/install (fig. 31). Clean/lubricate.	Repair/replace. Refer to TM 9-1005-234-14P for authorized parts.
Grenade Launcher Sight, M15	Remove/install (fig. 31). Clean/lubricate.	Repair/replace. Refer to TM 9-1005-234-14P for authorized parts.
Bayonet-Knife, M5 and M5A1	Remove/install (fig 31). Clean/lubricate.	Repair/replace. Refer to TM 9-1005-237-15P for authorized parts.
Scabbard, M8A1	Clean.	Repair/replace. Refer to TM 9-1005-237-15P for authorized parts.
Winter trigger kit	Clean/lubricate.	Repair/replace. Adjust trigger bar. Refer to appendix B for authorized parts.

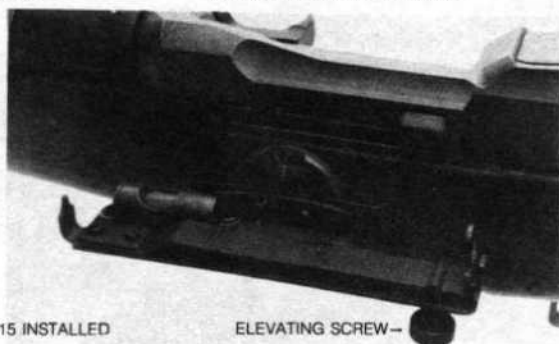
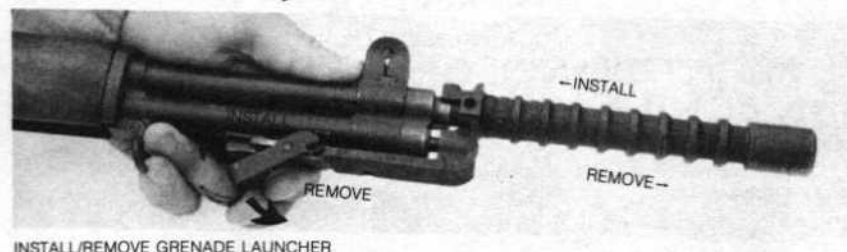
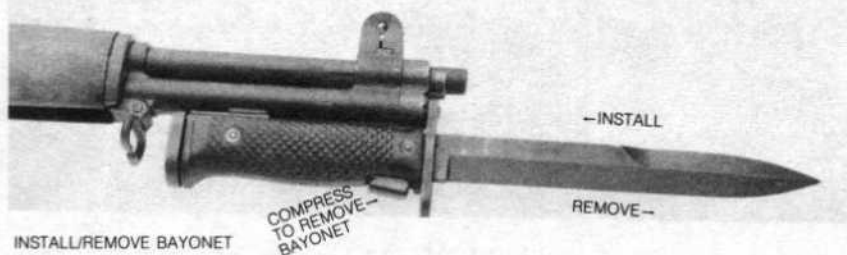


Figure 31. Materiel used in conjunction with major items.

TM9-1005-222-12
Chapter 5
AMMUNITION

Ammunition is loaded into 8 round clips, which are inserted, en bloc, into the magazine. (see fig. 32).

5-1. Types

Refer to SC 1305/30 IL for identification of various types of ammunition.

5-2. Care, handling, Preservation, and Destruction

Refer to TM 9-1300-206.

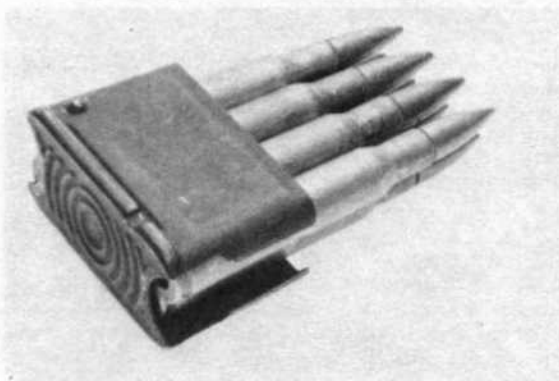


Figure 32. Cartridges and clip.

TM9-1005-222-12
Chapter 6
**DESTRUCTION OF MATERIEL TO PREVENT
ENEMY USE**

6-1. General

a. Destruction of the rifle when subject to capture or abandonment in the combat zone, will be undertaken only when in the judgment of the commander concerned such action is necessary. If destruction is resorted to, the equipment must be so badly damaged that it cannot be restored to a usable condition in the combat zone either by repair or cannibalization. The reporting of the destruction of equipment is to be through regular channels.

b. Priorities for destruction of repair parts are:

- (1) Firing pin
- (2) Extractor
- (3) Ejector
- (4) Hammer spring
- (5) Trigger
- (6) Safety

Appendix A REFERENCES

A-1. Publication Indexes

Consult the following publication indexes frequently for the latest changes or revisions of references and for new publications relating to material covered in this manual.

Index of Administrative Publications	DA Pam 310-1
Index or Army Films, Transparencies, GTA Charts, and Recordings	DA Pam 108-1
Index of Blank Forms	DA Pam 310-2
Index of Doctrinal, Training and Organizational Publications	DA Pam 310-3
U.S. Army Equipment Index of Modification Work Orders	DA Pam 310-7
Index of Supply Catalogs and Supply Manuals (excluding types 7, 8 and 9)	DA Pam 310-6
Index of Technical Manuals, Technical Bulletins, Supply manuals (types 7, 8 and 9) Supply Bulletins, and Lubrication Orders	DA Pam 310-4

A-2. Forms

DA Form 2028, Recommended Changes to DA Publications
DA Form 2407, Maintenance Request
DD Form 6, Report of Damaged or Improper Shipment
DA Form 9-79, Parts Requisition

A-3. Other Publications

The following explanatory publications pertain to this material.

a. General

Accident Reporting and Records	AR385-40
Administrative Storage of Equipment	TM 740-90-1
Army Equipment Record Procedures	TM 38-750
Authorized Abbreviations and Brevity Codes	AR 320-50
Dictionary of United States Army Terms	AR 320-5
Military Symbols	FM 21-30

b. Ammunition.

Ammunition, General	TM 9-1900
Care, Handling, Preservation, and Destruction of Ammunition	TM 9-1300-206
Disposal of Supplies and Equipment: Ammunition	AR 755-140-1
Explosives and Demolitions	FM 5-25
Malfunctions Involving Ammunition and Explosives	AR 700-1300-8

c. Inspection and Maintenance.

Cleaning of Ordinance Materiel	TM 9-208-1
Grenades and Pyrotechnics	FM 23-30
Operator, Organizational, DS and GS Maintenance Repair Parts and Special Tool Lists for Launchers, Grenade, M7A3 and M76	TM 9-1005-234-14P
Organizational, DS, GS and Deposit Maintenance Repair Parts and Special Tools List: Bayonet-Knife, M4, M5, M5A1, M6 and M7, and Bayonet- Knife Scabbard M8A1	TM 9-1005-237-15P
U.S. Rifle Caliber .30, M1	FM 23-5

d. Training.

Military Training Management	FM 21-5
Techniques of Military Instruction	FM 21-6

Appendix B

ORGANIZATIONAL MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LIST

Section I. INTRODUCTION

B-1. Scope

This appendix lists basic issue items, repair parts, and special tools required for the performance of organizational maintenance of the Rifles M1, M1C (Sniper's) and M1D (Sniper's).

B-2. General

The Basic Issue Items, Repair Parts, and Special Tools List is divided into the following sections:

- a. **Basic Issue Items List-Section II.** A list of items which accompany the rifle and are required by the operator/crew for installation, operation, or maintenance.

- b. **Maintenance and Operating Supplies-Section III.** A listing of maintenance and operating supplies required for initial operation.

- c. **Prescribed Load Allowance (PLA)-Section IV.** A composite listing of repair parts, special tools, test and support equipment having quantitative allowances for initial stockage at the organizational level.

- d. **Repair Parts-Section V.** A list of repair parts authorized for the performance of maintenance at the organizational level in figure and item number sequence.

- e. **Special Tools, Test and Support Equipment-Section VI.** A list of special tools, test and support equipment authorized for the performance of maintenance at the organizational level.

- f. **Federal Stock Number and Reference Number Index-Section VII.** A list of Federal stock numbers in ascending numerical sequence, followed by a list of reference numbers, appearing in all the listings, in ascending alpha-numeric sequence, cross-referenced to the illustration figure number and item number.

B-3. Explanation of Columns

The following provides an explanation of columns in the tabular lists in Sections II through VI.

a. Source, Maintenance, and Recoverability Codes (SMR).

(1) **Source Code.** Indicates the selection status and source for the listed item. Source codes used are:

Code	Explanation
P	Repair parts which are stocked in or supplied from the GSA/DSA, or Army supply system, and authorized for use at indicated maintenance categories.
P2	Repair parts which are procured and stocked for insurance purposes because the combat or military essentiality of the end item dictates that a minimum quantity be available in the supply system.
M	Repair parts which are not procured or stocked but are to be manufactured in indicated maintenance levels.
A	Assemblies which are not procured or stocked as such but are made up of two or more units. Such component units carry individual FSN's and descriptions, are procured and stocked separately and can be assembled to form the required assembly at indicated maintenance categories.
X	Parts and assemblies which are not procured or stocked and the mortality of which is normally below that of the applicable end item or component. The failure of such part or assembly should result in retirement of the end item from the supply system.
X1	Repair parts which are not procured or stocked. The requirement for such items will be filled by use of the next higher assembly or component.

X2	Repair parts which are not stocked. The indicated maintenance category requiring such repair parts will attempt to obtain through cannibalization; if not obtainable through cannibalization, such repair parts will be requisitioned with supporting justification through normal supply channels.
G	Major assemblies that are procured with PEMA funds for issue initial only to be used as exchange assemblies at DSU and GSU level. These assemblies will not be stocked above DSU and GSU level or returned to Depot supply level.

(2) Maintenance Code. Indicates the lowest category of maintenance authorized to install the item. The maintenance level codes are:

Code	Explanation
C	Crew or operator
O	Organizational
F	Direct Support
H	General Support
D	Depot

(3) Recoverability Code. Indicates whether unserviceable items should be returned for recovery or salvage. Items not coded are expendable. The recoverability code is.

Code	Explanation
R	Repair parts and assemblies which are economically repairable at DSU and GSU activities and are normally furnished by supply on an exchange basis.
S	Repair parts and assemblies which are economically repairable at DSU and GSU activities and normally are furnished by supply on an exchange basis. When items are determined by a GSU to be uneconomically repairable, they will be evacuated to a depot for evaluation and analysis before final disposition.
T	High dollar value recoverable repair parts which are subject to special handling and are issued on an exchange basis. Such repair parts are normally repaired or overhauled at depot maintenance activities.
U	Repair parts specifically selected for salvage by reclamation units because of precious metal content, critical materials, high dollar value reusable casings, or castings.
	No Code indicated-Part will be considered expendable.

b. Federal Stock Number. Indicates the Federal stock number assigned to the item and will be used for requisitioning purposes.

c. Description. Indicates the Federal item name and any additional description of the item required. The abbreviation "w/e" when used as a part of the nomenclature, indicates the Federal stock number includes all armament, equipment, accessories, and repair parts issued with the item. A part number or other reference number is followed by the applicable five-digit Federal supply code for manufacturers in parentheses.

d. Unit of Measure (U/M). A 2 character alphabetic abbreviation indicating the amount or quantity of the item upon which the allowances are based, e.g., ft, ea, pr, etc.

e. Quantity Incorporated in Unit. Indicates the quantity of the item used in the functional group or assembly. A "V" appearing in this column in lieu of a quantity indicates that a definite quantity cannot be indicated (e.g., shims, spacers, etc.).

f. Quantity Furnished with Equipment. Indicates the quantity of an item furnished with the equipment (BILL only).

g. Component Application. Identifies the component application of each maintenance or operating supply item (M&O supplies only).

k. 15-Day Organizational Maintenance Allowances.

(1) The allowance columns are divided into four subcolumns. Indicated in each sub-column opposite the first appearance of each item is the total quantity of items authorized for the number of equipments supported. Subsequent appearances of the same item will have the letters "REF" in the allowance columns. Items authorized for use as required but not for initial stockage are identified with an asterisk in the allowance column.

(2) The quantitative allowances for organizational level of maintenance represents one initial prescribed load for a 15-day period for the number of equipments supported. Units and organizations authorized additional prescribed loads will multiply the number of prescribed loads authorized by the quantity of repair parts reflected in the appropriate density column to obtain the total quantity of repair parts authorized.

(3) Organizational units providing maintenance for more than 100 of these equipments shall determine the total quantity of parts required by converting the equipment quantity to a decimal factor by placing a decimal point before the next to last digit of the number to indicate hundredths, and multiplying the decimal factor by the parts quantity authorized in the 51-100 allowance column. Example, authorized allowance for 51-100 equipments is 12; for 140 equipments multiply 12 by 1.40 or 16.80 rounded off to 17 parts required.

(4) Subsequent changes to allowances will be limited as follows: No change in the range of items as follows: No change in the range of items is authorized. If additional items are considered necessary, recommendations should be forwarded to Commanding General, Headquarters, U.S. Army Weapons Command, ATTN: AMSWE-SMM-SA, Rock Island, Illinois 61201, for exception or revision to the allowance list. Revisions to the range of items authorized will be made by the U.S. Army Weapons Command based upon engineering experience, demand data, or TAERS information.

I. Illustration.

(1) **Figure Number.** Indicates the figure number of the illustration in which the item is shown.

(2) **Item Number.** Indicates the callout number used to reference the item in the illustration.

Note. Items called-out on illustration, but not listed, are for disassembly purposes only.

B-4. Special Information

Identification of the usable on codes of this publication are:

Code	Used on
No Code ...	M1, M1C, and M1D
A	M1
B	M1C
C	M1D
D	M1 and M1C
E	M1 and M1D
F	M1C and M1D

B-5. How to Locate Repair Parts

a. When Federal stock number or reference number is unknown:

(1) **First.** Using the table of contents determine the functional group or assembly, within which the repair part belongs. This is necessary since illustrations are prepared for functional groups and assemblies, and listings are divided into the same groups.

(2) **Second.** Find the illustration covering the functional group or assembly to which the repair part belongs.

(3) **Third.** Identify the repair part on the illustration and note the illustration figure and item number of the repair part.

(4) **Fourth.** Using the Repair Parts Listing, find the functional group or assembly to which the repair part belongs and locate the illustration figure and item number noted in the illustration.

b. When Federal stock number or reference number is known:

(1) **First.** Using the Index of Federal Stock Numbers and Reference Numbers find the pertinent Federal stock number or reference number. This index is in ascending FSN sequence followed by a list of reference numbers in alpha-numeric sequence, cross-referenced to the illustration figure number and item number.

(2) **Second.** Using the Repair Part Listing, find the functional group or assembly of the repair part and the illustration figure number and item number referenced in the Index of Federal Stock Numbers and Reference Numbers.

B-6. Federal Supply Codes for Manufacturers

Code	Manufacturer
19200	Frankford Arsenal
19204	Rock Island Arsenal
19205	Springfield Armory

Section II. BASIC ISSUE ITEMS LIST

(2) Federal Stock No.	(3) Description Reference Number & Mfr. Code	(4) Unit of issue	(5) Qty. inc. in unit	(6) Qty. furn. with equip.	(7) Illustration	
					(a) Fig. No.	(b) Item No.
	RIFLES, CALIBER .30, M1, M1C (SNIPER'S) AND M1D (SNIPER'S) REPAIR PARTS: NONE AUTHORIZED TOOLS AND EQUIPMENT					
1005-556-4174	BRUSH, CLEANING, SMALL ARMS: BORE 5564174 (19205)	EA	--	1	33	1
1005-691-1381	BRUSH, CLEANING, SMALL ARMS: CHAMBER 7790582 (19205)	EA	--	1	33	2
1005-791-3377	CASE LUBRICANT: 7790995 (19205)	EA	--	1	33	7
1005-650-4510	CASE, SMALL ARMS CLEANING ROD: 7267754 (19204)	EA	--	1	33	6
1005-793-6761	HANDLE ASSEMBLY: CLEANING ROD: 7266115 (19204)	EA	--	1	33	3
1005-726-6109	ROD SECTION, CLEANING, SMALL ARMS: 7266109 (19205)	EA	--	4	33	4
1005-654-4058	SLING, SMALL ARMS: 6544058 (19205)	EA	--	1	34	
1005-726-6110	SWAB HOLDER SECTION, SMALL ARMS CLEANING ROD: 7266110 (19204)	EA	--	1	33	5

Section III. MAINTENANCE AND OPERATING SUPPLIES

(1) Component application	(2) Federal stock number	(3) Description
CALIBER .30 RIFLES M1, M1C (Sniper's) and M1D (Sniper's)	1005-288-3565	SWAB, SMALL ARMS CLEANING: COTTON 2½ sq (1,000 IN PKG) 5019316 (19204)

Section IV. PRESCRIBED LOAD ALLOWANCE

(1) Federal stock No.	(2) Description Usable on code	(3) Qty. inc. in unit pack	(4) 15-day organizational maint. allowance			
			(a) 1-5	(b) 6-20	(c) 21-50	(d) 51-100
	REPAIR PARTS:					
1005-313-9441	SCREW	--	--	2	2	2
1005-501-3667	PIN, SHOULDER, HEADED	--	--	--	2	2
1005-554-6015	SAFETY, SMALL ARMS	--	--	--	2	2
1005-554-6018	EJECTOR	--	--	--	--	2
1005-554-6024	GUARD, HAND GUN	--	--	--	2	2
1005-554-6026	TRIGGER	--	--	--	--	2
1005-556-4245	GUARD, HAND GUN	--	--	2	2	2
1005-600-8616	EJECTOR, CARTRIDGE	--	--	--	2	2
1005-600-6818	PLUNGER, EXTRACTOR SPRING	--	--	2	2	2
1005-600-8868	APERTURE, SIGHT	--	--	2	2	2
1005-600-8879	PIN, FIRING	--	--	--	2	2
1005-600-8885	SPRING, HELICAL, COMPRESSION	--	--	--	2	2
1005-600-8887	SPRING, HELICAL, COMPRESSION	--	--	2	2	2
1005-600-8891	SWIVEL, STACKING	--	--	2	2	2
1005-614-7568	SPRING, HELICAL, COMPRESSION	--	--	--	2	2
1005-731-2556	GUARD, HAND, GUN	--	--	2	2	2
1005-731-2737	KNOB	--	--	2	2	2
1005-819-4501	PIN, TRIGGER	--	--	2	2	2
1005-953-9504	EXTRACTOR, CARTRIDGE	--	--	2	2	2
1005-999-3400	PINION	--	--	2	2	3
5305-501-3678	SCREW, MACHINE	--	--	--	2	2
5315-501-3668	PIN, STRAIGHT, HEADED	--	--	2	2	3
	TOOLS AND EQUIPMENT:					
1005-288-3565	SWAB, SMALL ARMS CLEANING	--	--	2	2	2
1005-556-4174	BRUSH, CLEANING, SMALL ARMS	--	--	2	3	6
1005-650-4510	CASE, SMALL ARMS CLEANING ROD	--	--	2	2	2
1005-654-4058	SLING, SMALL ARMS	--	--	2	2	3
1005-691-1381	BRUSH CLEANING, SMALL ARMS	--	--	2	2	3
1005-694-1662	BUFFER, CLEANING ROD	--	--	2	2	3
1005-726-6109	ROD SECTION, CLEANING, SMALL ARMS	--	--	2	2	2
1005-726-6110	SWAB HOLDER SECTION, SMALL ARMS CLEANING ROD	--	--	2	2	3
1005-791-3377	CASE, LUBRICANT	--	--	2	2	2
1005-793-6761	HANDLE ASSEMBLY	--	--	2	2	2
1240-763-1596	CASE, TELESCOPE	--	--	--	2	2

Section V. REPAIR PARTS LIST

(1) Source maint. recov. code			(2) Federal stock No.	(3) Description	(4) Unit of inc in means	(5) Qty inc in unit	(6) 15 day organizational maintenance allow				(7) Illustration	
(a)	(b)	(c)					(a) 1-5	(b) 6-20	(c) 21-50	(d) 51-100	(a) Figure No.	(b) Item No.
				Reference Number & Mfr Code								
				REPAIR PARTS FOR: RIFLES, CALIBER .30, M1, M1C (SNIPER'S) AND M1D (SNIPER'S)								
				TRIGGER HOUSING ASSEMBLY								
P	O	--	1005-819-4501	PIN, TRIGGER: 7791367 (19205)	EA	1	*	1	2	3	35	1
P	O	--	1005-554-6026	TRIGGER: 5546026 (19205)	EA	1	*	*	*	2	35	2
P	O	--	1005-600-8887	SPRING, HELICAL, COMPRESSION: 20 COILS, HAMMER 6008887 (19205)	EA	1	*	2	2	2	35	4
P	O	--	5315-501-3668	PIN, STRAIGHT, HEADED: S, FL-FIL-HD, 0.187 MAX DIA SHANK, 3/4 NOM LG UNDER 5013668 (19204)	EA	1	*	2	2	3	B-2	*6
P	O	--	1005-554-6015	SAFETY SMALL ARMS:	EA	1	*	*	2	2	35	8/8W
P	O	--	1005-554-6018	EJECTOR: CLIP 5546018 (19205)	EA	1	*	*	*	2	35	10
				BARREL AND RECEIVER GROUP:								
P	O	--	1005-614-7568	SPRING, HELICAL, COMPRESSION: 200 TOTAL COILS, OPERATING ROD 6147568 (19205)	EA	1	*	*	2	2	36	2
A	--	--	-----	BOLT ASSEMBLY 5546023	--	--	--	--	--	--	36	4
P	O	--	1005-953-9504	EXTRACTOR, CARTRIDGE:	EA	1	*	2	2	2	36	5
P	O	--	1005-600-8616	EJECTOR, CARTRIDGE:	EA	1	*	*	2	2	36	6
P	O	--	1005-600-8618	PLUNGER, EXTRACTOR SPRING: 6008618 (19205)	EA	1	*	2	2	2	36	7
P	O	--	1005-600-8879	PIN, FIRING: BOLT ASSY 6008879 (19205)	EA	1	*	*	2	2	36	8
P	O	--	1005-501-3667	PIN, SHOULDER, HEADED: FOLLOWER ARM 5013667 (19204)	EA	1	*	*	2	2	36	10
P	O	--	1005-313-9441	SCREW: GAS CYLINDER LOCK 7267797 (19205)	EA	1	*	2	2	2	36	15

P	O	--	5305-501-3678	SCREW, MACHINE: S, FIL-HD, NO. 10(0.190) -32NF-2 X 0.700 MAX LG (STACKING SWIVEL) 5013678 (19204)	EA	1	*	*	2	2	36	18
P	O	--	1005-600-8891	SWIVEL, STACKING: GAS CYLINDER 6008891 (19205)	EA	1	*	2	2	2	36	19
P	O	R	1005-556-4245	GUARD, HAND, GUN: FRONT	EA	1	*	2	2	2	36	20
P	O	R	1005-554-6024	GUARD, HAND, GUN: REAR	EA	1	*	*	2	2	36	23
P	O	R	1005-731-2556	GUARD, HAND, GUN: REAR 7312556 (19205)	EA	1	*	2	2	2	36	24
P	O	--	1005-600-885	SPRING, HELICAL, COMPRESSION: 6-7/8 COILS (LATCH) 6008885 (19205)	EA	1	*	*	2	2	36	27
P	O	--	1005-731-2737	KNOB: WINDAGE	EA	1	*	2	2	2	36	28
P	O	--	1005-999-3400	PINION: ELEVATING 11010364 (19204)	EA	1	*	2	2	3	36	29
P	O	--	1005-600-8868	APERTURE, SIGHT: 6008868 (19204)	EA	1	*	2	2	2	36	30
				TELESCOPE, M84	--	--	--	--	--	--	37	1
P	O	--	1240-766-7454	EYESHIELD: 7667454 (19200)	EA	1	*	*	*	*	37	2
				KIT, WINTER TRIGGER								
P	O	--	1005-775-0364	TRIGGER ASSEMBLY, WINTER: M5 7790808 (19205)	EA	1	*	*	*	*	38	1
P	O	--	5305-990-6435	SCREW, TAPPING, THREAD FORMING: 7791415 (19205)	EA	2	*	*	*	*	38	2
P	O	--	1005-010-5022	WASHER, HINGE RETAINING: TRIGGER ASSEMBLY 7791237 (19205)	EA	1	*	*	*	*	38	3
P	O	--	1005-778-0580	SAFETY, WINTER: 7790903 (19205)	EA	1	*	*	*	*	38	5
				MATERIAL REQUIRED FOR COLD WEATHER CLIMATES								
				THE FOLLOWING ITEM IS ISSUED OR REQUISITIONED ONLY BY SPECIAL AUTHORIZATION OF AREA COMMANDER.								
--	R	--	1005-777-1369	KIT, WINTER TRIGGER: FOR ARCTIC HANDWEAR 5910520 (19204)	EA							
				NOTE. INSTALLATION WILL BE PERFORMED BY DIRECT SUPPORT MAINTENANCE PERSONNEL.								

Section VI. SPECIAL TOOLS, TEST AND SUPPORT EQUIPMENT

(1) Source maint. recv. code			(2) Federal stock No.	(3) Description	(4) Unit of meas.	(5) Qty inc in unit	(6) 15 day organizational maintenance allow				(7) Illustration	
(a)	(b)	(c)					(a) 1-5	(b) 6-20	(c) 21-50	(d) 51-100	(a) Figure No.	(b) Item No.
				Reference Number & Mfr Code								
				TOOLS AND EQUIPMENT								
				TOOLS AND EQUIPMENT AUTHORIZED FOR UNIT REPLACEMENT								
--	C	--	1005-228-3536	SWAB, SMALL ARMS CLEANING: COTTON, 2½ SQ (1,000 IN PG) 5019316 (19204)	PG	--	*	2	2	2		
--	C	--	1005-556-4174	BRUSH, CLEANING, SMALL ARMS: BORE 5564174 (19205)	EA	--	*	2	3	6	33	1
--	C	--	1005-650-4510	CASE, SMALL ARMS CLEANING ROD: 7267754 (19205)	EA	--	*	2	2	2	33	6
--	C	--	1005-654-4058	SLING, SMALL ARMS:	EA	--	*	2	2	3	34	*
--	C	--	1005-691-1381	BRUSH, CLEANING, SMALL ARMS: CHAMBER 7790583 (19205)	EA	--	*	2	2	3	33	2
--	C	--	1005-726-6109	ROD SECTION, CLEANING, SMALL ARMS: 7266109 (19205)	EA	--	*	2	2	2	33	4
--	C	--	1005-726-6110	SWAB HOLDER SECTION, SMALL ARMS CLEANING ROD: 7266110 (19204)	EA	--	*	2	2	3	33	5
--	C	--	1005-791-3377	CASE, LUBRICANT: 7790995 (19205)	EA	--	*	2	2	2	33	7
--	C	--	1005-793-6761	HANDLE ASSEMBLY: CLEANING ROD 7266115 (19204)	EA	--	*	2	2	2	33	3
				ORGANIZATIONAL MAINTENANCE TOOLS AND EQUIPMENT (FOR ARMORERS USE) THE 15-DAY LEVEL IS NOT APPLICABLE.								
--	O	--	1005-722-8907	ENVELOPE: FABRIC, 2-BUTTON, 3H X 4-7/8W 7228907 (19205)	EA	--	1	--	--	--	40	1
--	O	--	4933-628-9700	REFLECTOR, GUN BARREL: 7790138 (19205)	EA	--	1	--	--	--	40	2
--	O	--	4933-652-9950	EXTRACTOR, RUPTURED CARTRIDGE CASE: 7790352 (19205)	EA	--	1	--	--	--	40	3

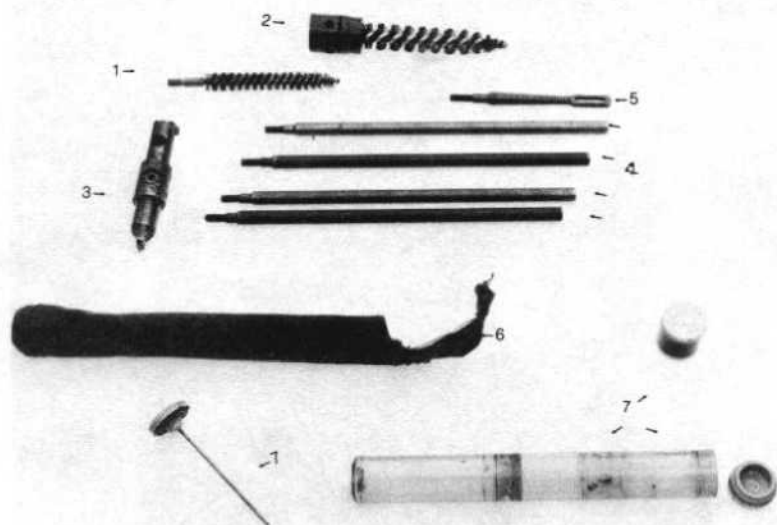


Figure 33. Basic cleaning tools.

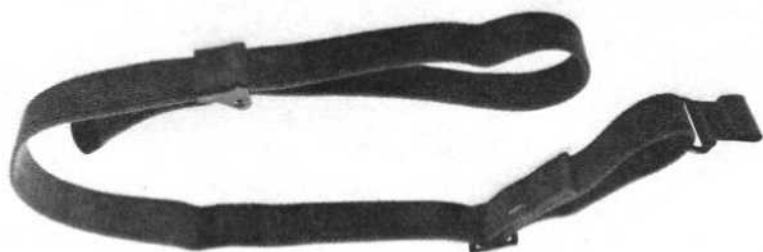


Figure 34. Web sling.

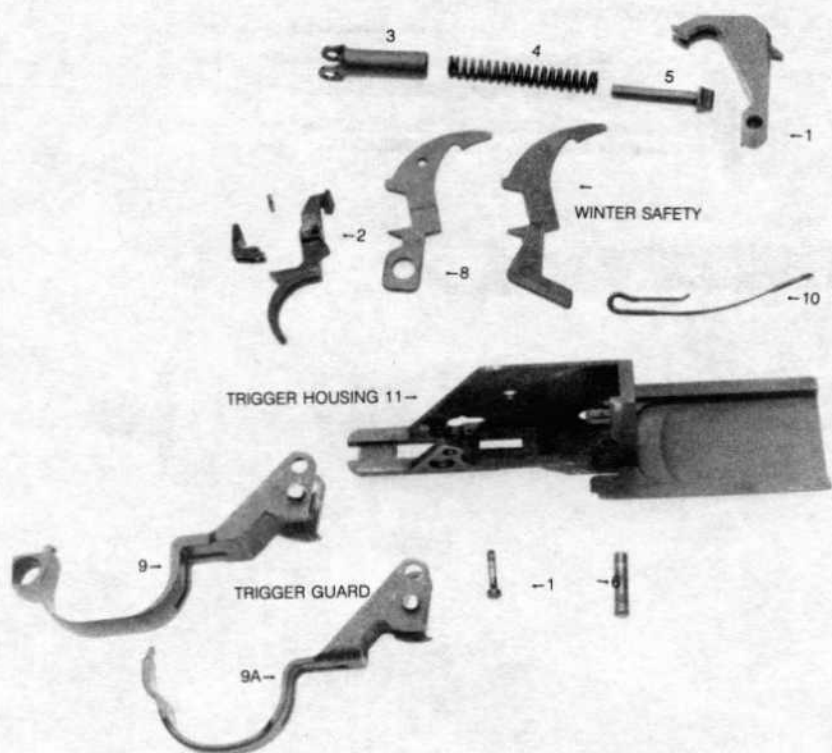


Figure 35. Trigger assembly - exploded view.

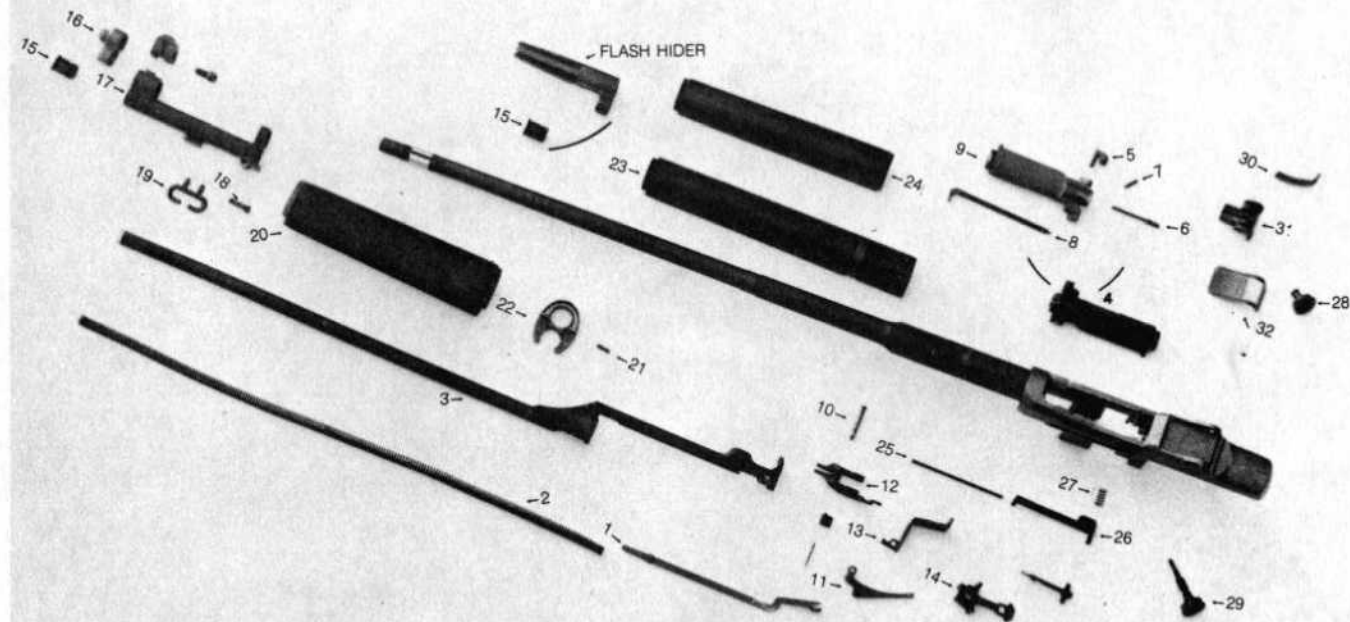


Figure 36. Barrel and receiver group - exploded view.

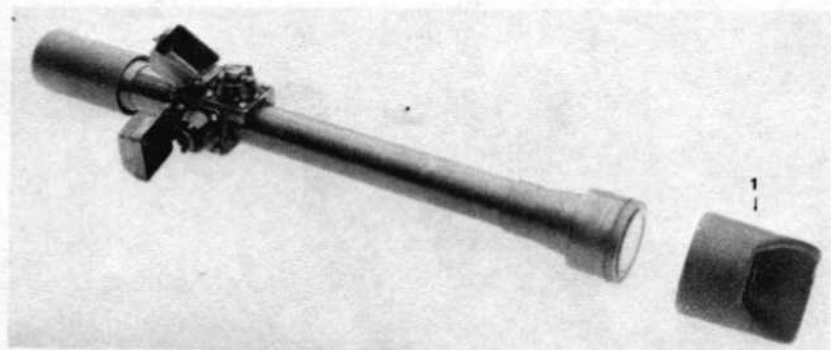


Figure 37. Telescope, M 84.

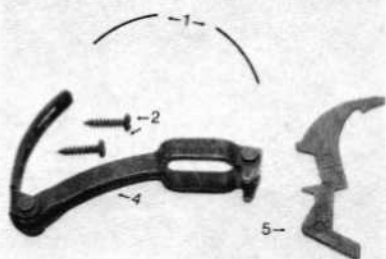


Figure 38. Winter trigger kit - exploded view.



Figure 39. Winter trigger kit, type T-36.


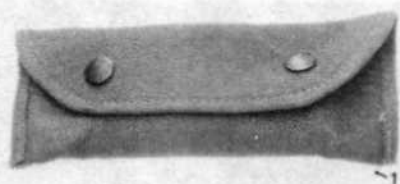


Figure 40. Special tools and equipment.

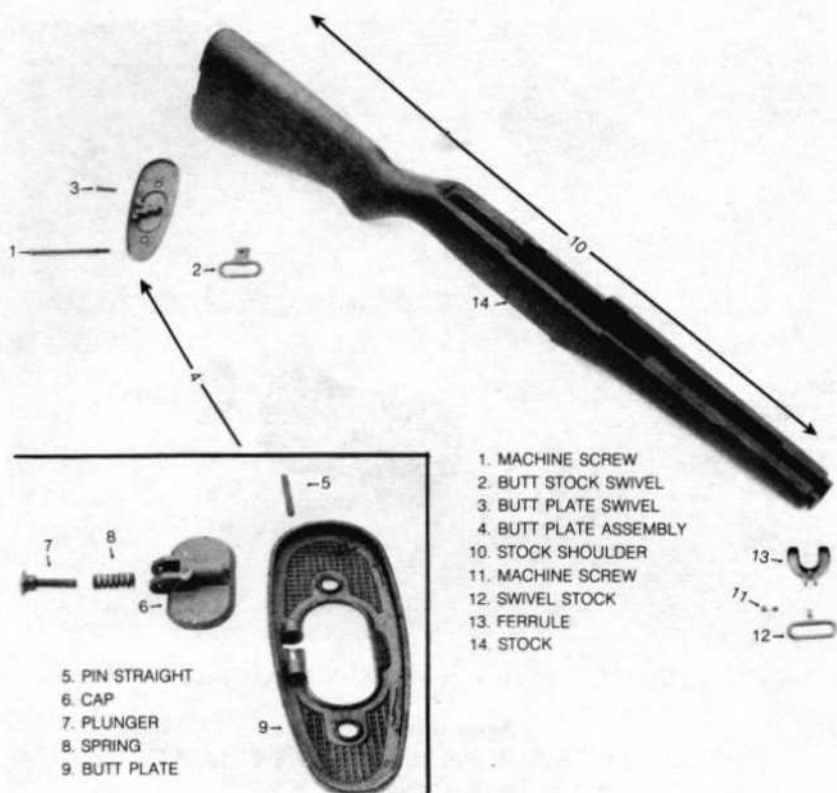


fig. 8
 Figure 41. Stock group - exploded view.

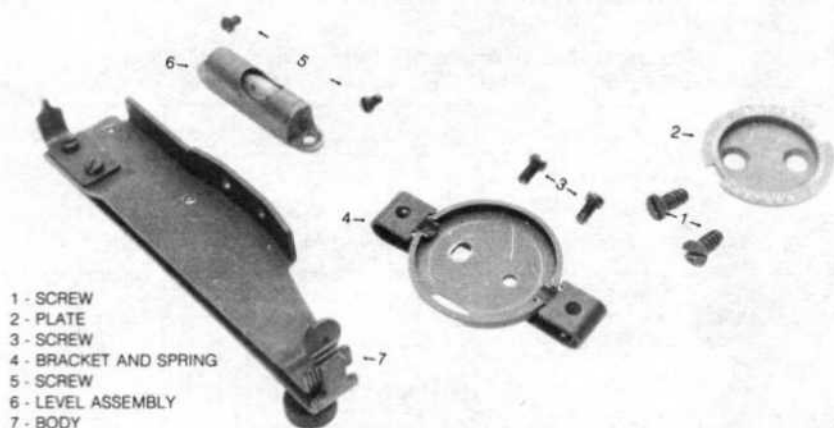


Figure 42. Grenade launcher sight, M 15 - exploded view.



Figure 43. Gas cylinder cap screws, current type and old type.

NOTE: THIS ITEM MAY NOT
BE DISASSEMBLED.
ILLUSTRATION IS FOR
REFERENCE ONLY.



Figure 44. Gas cylinder cap screw, current type — exploded view.

Appendix C MAINTENANCE ALLOCATION CHART

Section I. INTRODUCTION

C-1. General

The maintenance allocation chart indicates specific maintenance operations performed at proper maintenance levels. Deviation from maintenance operations allocated in the chart is authorized only upon approval of the Commanding Officer.

Section II. Maintenance Allocation Chart for Rifle, Caliber .30, M1, M1C (Sniper's), and M1D (Sniper's)

(1) Group number	(2) Functional group	(3) Maintenance function										(4) Tool and equipment	(5) Remarks
		Inspect	Test	Service	Adjust	Align	Calibrate	Install	Replace	Repair	Overhaul	Rebuild	
1	TRIGGER HOUSING ASSEMBLY	C	—	C	—	—	—	C	—	O	D	—	
2	STOCK ASSEMBLY	C	—	C	—	—	—	C	—	F	D	—	
3	BARREL AND RECEIVER GROUP	C	—	C	—	—	—	—	—	O	D	—	
4	TELESCOPE, M84	C	—	C	—	—	—	H	—	D	—	—	
5	TELESCOPE, W/BACKET	C	—	C	—	—	—	C	—	O	—	—	
6	MOUNT ASSEMBLY, M1C	C	—	C	—	—	—	F	—	F	D	—	
7	MOUNTING BRACKET ASSEMBLY M1D	C	—	C	—	—	—	F	—	F	D	—	
8	CHEEK PAD ASSEMBLY, M1C & M1D	C	—	C	—	—	—	F	F	—	D	—	

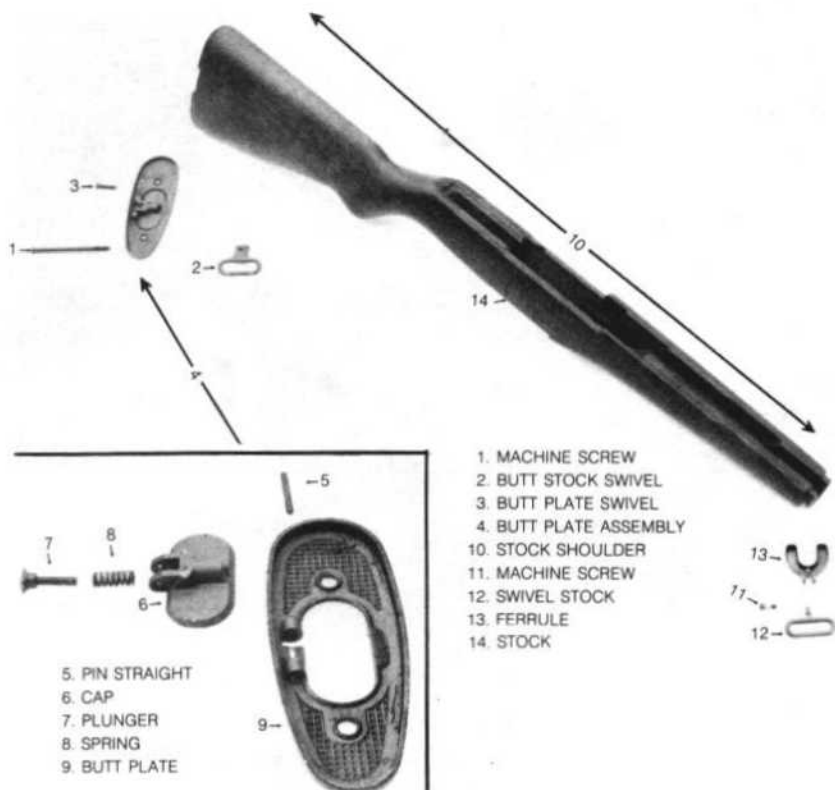


fig. 8
 Figure 41. Stock group - exploded view.

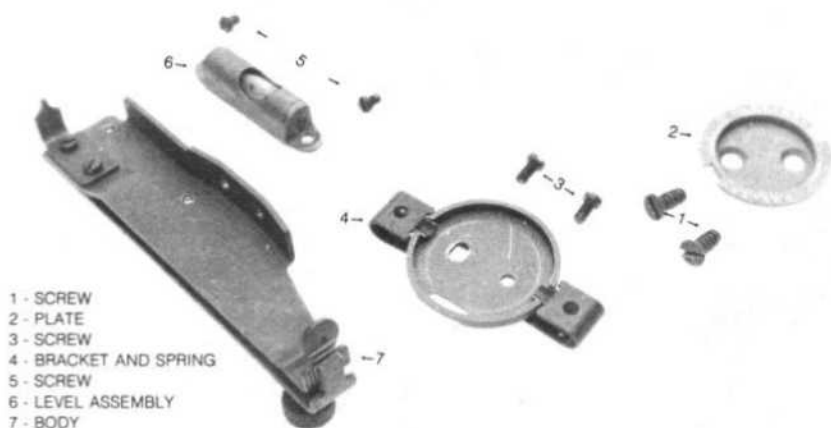


Figure 42. Grenade launcher sight, M 15 - exploded view.

C-2. Maintenance Functions

The maintenance allocation chart designates overall responsibility for the maintenance function of an end item or assembly. Maintenance functions will be limited to and defined as follows:

INSPECT	To determine serviceability of an item by comparing its physical, mechanical, and electrical characteristics with established standards.
TEST	To verify serviceability and to detect electrical or mechanical failure by use of test equipment.
SERVICE	To clean, to preserve, to charge, and to add fuel, lubricants, cooling agents, and air.
ADJUST	To rectify to the extent necessary to bring into proper operating range.
ALIGN	To adjust specified variable elements of an item to bring to optimum performance.
CALIBRATE	To determine the corrections to be made in the readings of instruments or test equipment used in precise measurement. Consists of the comparison of two instruments, one of which is a certified standard of known accuracy, to detect and adjust any discrepancy in the accuracy of the instrument being compared with the certified standard.
INSTALL	To set up for use in an operational environment such as an emplacement, site, or vehicle.
REPLACE	To replace unserviceable items with serviceable assemblies, subassemblies, or part.
REPAIR	To restore an item to serviceable condition. This includes, but is not limited to, inspection, cleaning, preserving, adjusting, replacing, welding, riveting, and strengthening.
OVERHAUL	To restore an item to a completely serviceable condition as prescribed by maintenance serviceability standards using the Inspect and Repair Only as Necessary (IROAN) technique.
REBUILD	To restore an item to a standard as nearly as possible to original or new condition in appearance, performance, and life expectancy. This is accomplished through complete disassembly of the item, inspection of all parts or components, repair or replacement of worn or unserviceable elements (items) using original manufacturing tolerances and specifications, and subsequent reassembly of the item.

C-3. Explanation of Format

Purpose and use of the format are as follows:

- Column 1, Group Number.* Lists group numbers, to identify components and assemblies.
- Column 2, Functional Group.* Lists the noun names of groups and assemblies on which maintenance is authorized.
- Column 3, Maintenance Functions.* Lists the various categories of maintenance to be performed on the weapon.
- Use of Codes.* Explanation of the use of codes in maintenance function, column 3, is as follows:

Code	Explanation	Code	Explanation
C	Operator/crew	H	General Support
O	Organizational	D	Depot
F	Direct Support		

e. Column 4, Tools and Equipment. This column will be used to specify those tools and test equipment required to perform the designated function.

f. Column 5, Remarks. Self-explanatory.

Note: Columns not utilized are considered not applicable.

ADDENDA

Supplemental Material From TM 9-1005-222-35

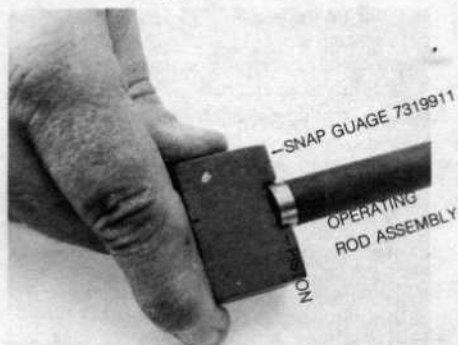


Figure 45. Gaging diameter of gas piston.

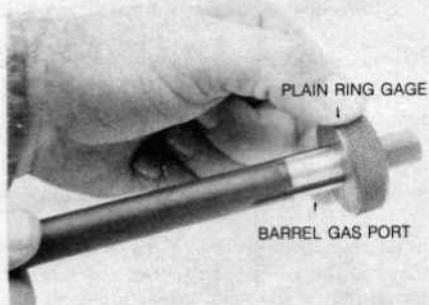


Figure 46. Gaging barrel diameter at gas port.



Figure 47. Gaging firing pin protrusion.




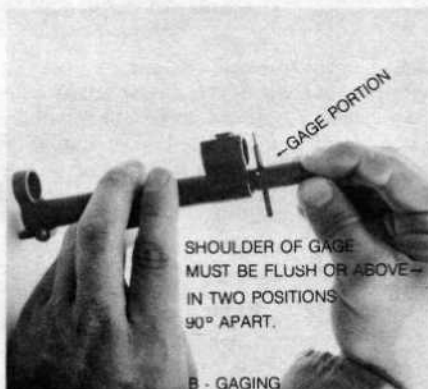


Figure 48. Reaming and gaging front interior of gas cylinder.

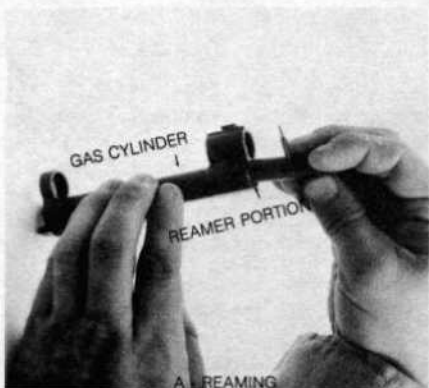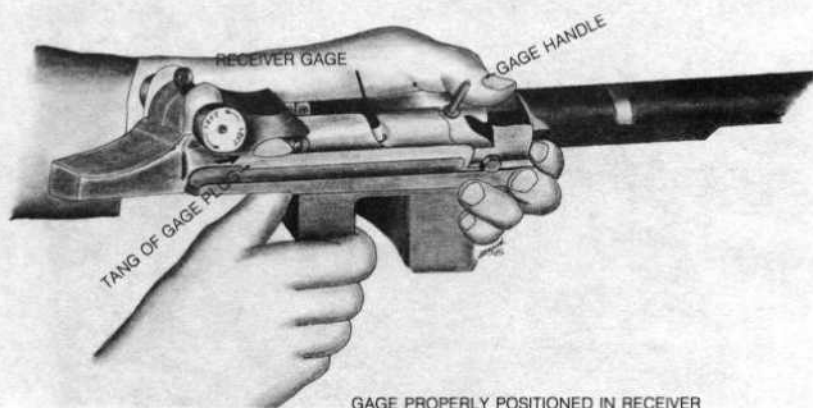

GAGE PROPERLY POSITIONED IN RECEIVER

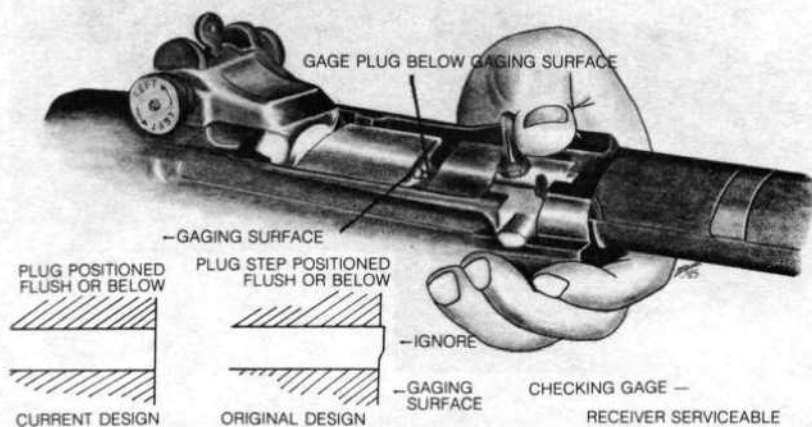

SERVICEABLE


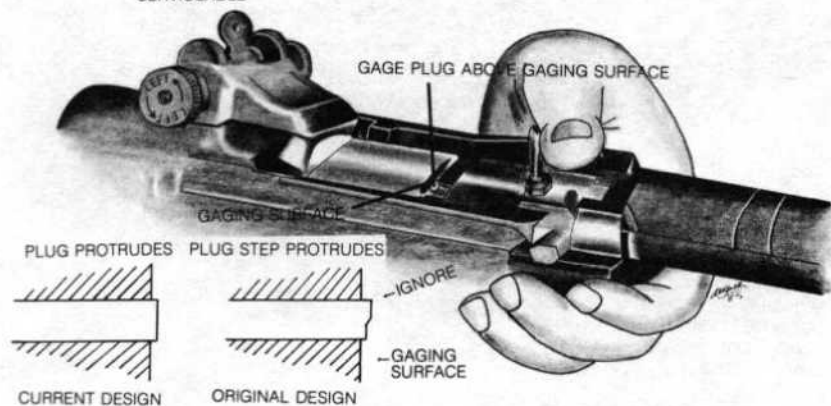


Figure 49. Gaging receiver.

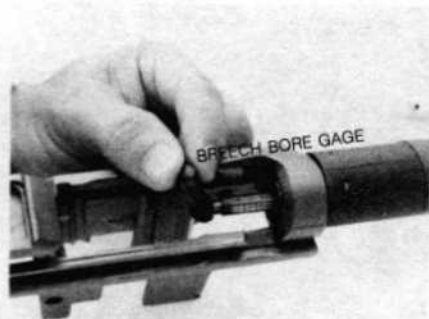

REJECT LIMIT 0.310

Figure 50. Gaging breech bore.

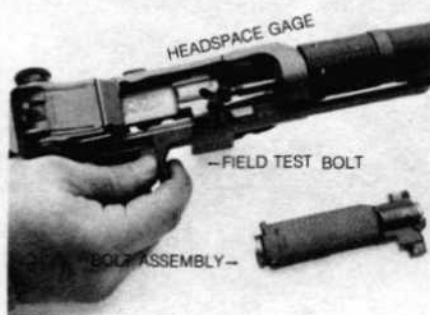


Figure 51. Checking headspace.



Figure 52. Checking trigger pull.

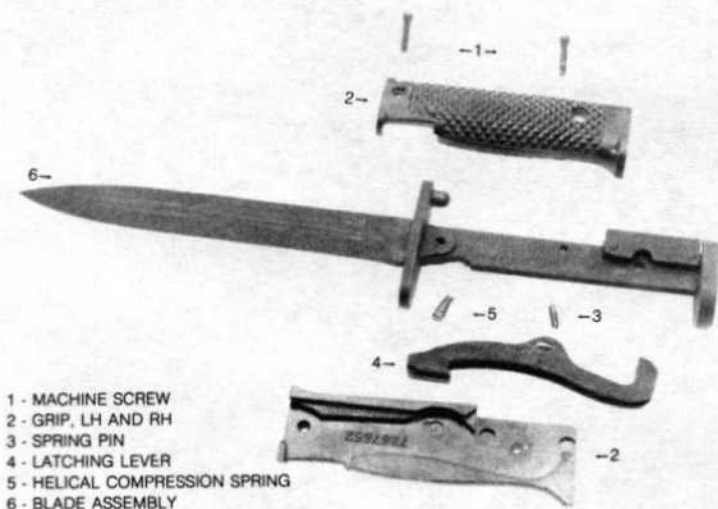


Figure 53. Bayonet knife, M 5A1 - exploded view.

NOTE: Bayonet knife M 5 differs internally, only, in position of helical spring.



Figure 54. Telescope, M 82 and mount assembly (M 1C, Sniper only).
From the collection of Bill Douglas.



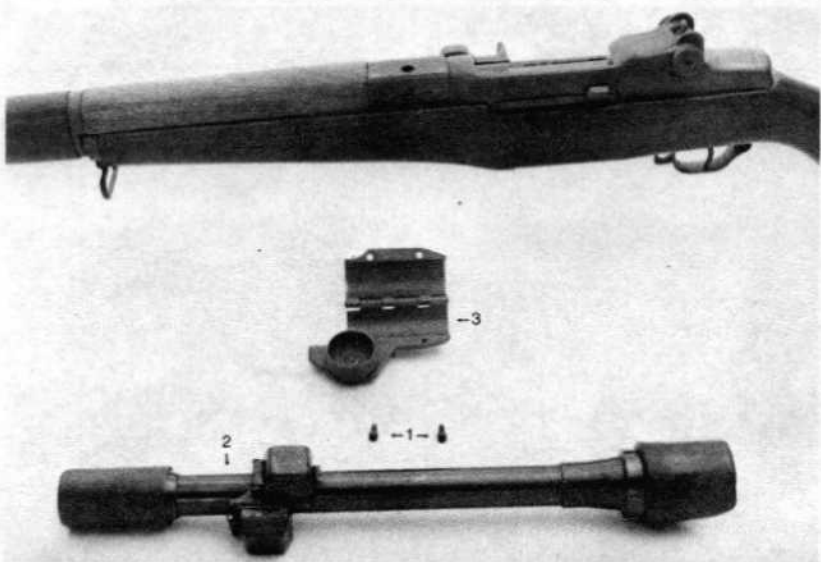



Figure 55. Telescope, M 84 and mount assembly (M 1D, Sniper only).

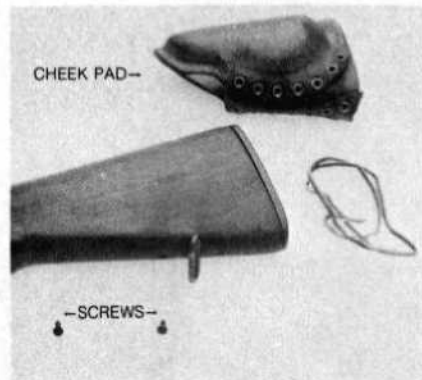

CHEEK PAD ASSEMBLY — EXPLODED VIEW
(M 1C (Sniper's) and M 1D (Sniper's) only).

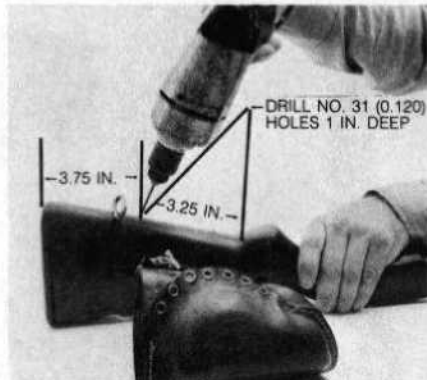

DRILLING HOLES IN STOCK ASSEMBLY FOR INSTALLING
WOOD SCREWS.

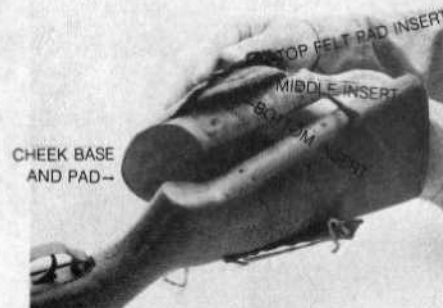

REMOVE/INSTALL CHEEK PAD.



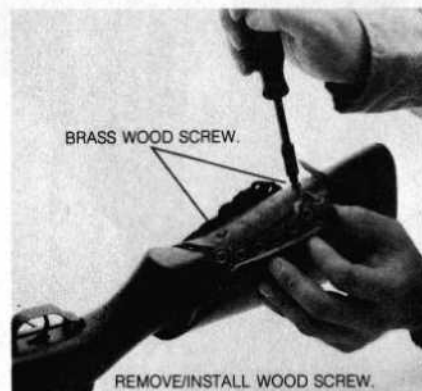



Figure 56. Installation/removal of cheek pad assembly, Rifles M 1C and M 1D (Sniper's)

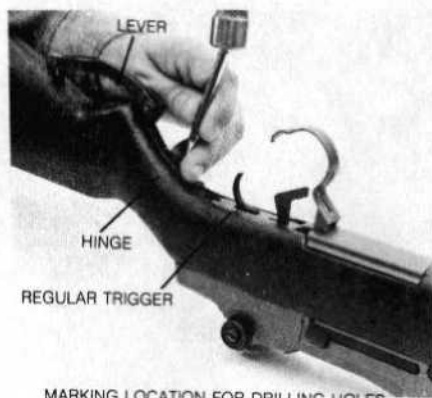

MARKING LOCATION FOR DRILLING HOLES.

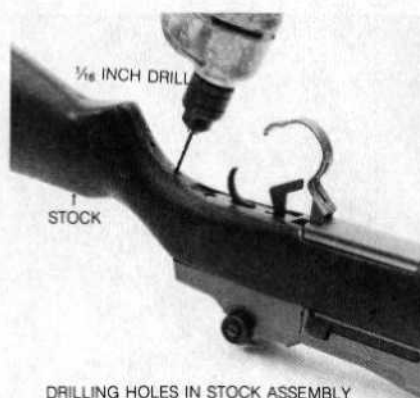


DRILLING HOLES IN STOCK ASSEMBLY

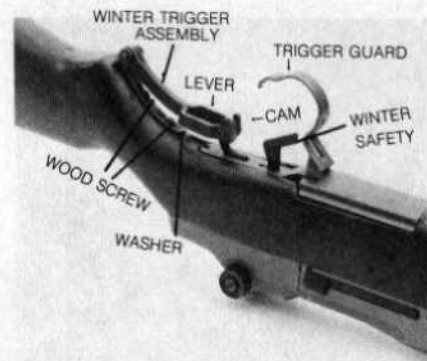

WINTER TRIGGER ASSEMBLY INSTALLED.

Figure 57. Installation of winter trigger bit.

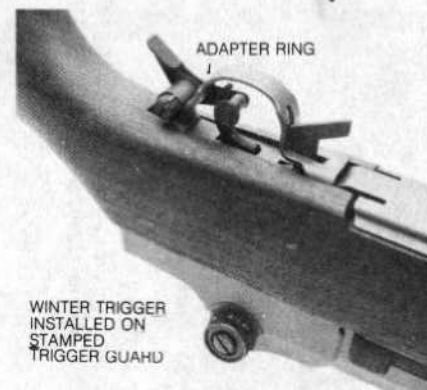

WINTER TRIGGER
INSTALLED ON
STAMPED
TRIGGER GUARD

Figure 58. Installation of alternate winter trigger bit. Type T-36

By Order of the Secretary of the Army:

W.C. WESTMORELAND,
General, *United States Army*,
Chief of Staff.

Official:

KENNETH G. WICKHAM,
Major General, *United States Army*,
The Adjutant General.

DISTRIBUTION:

To be distributed in accordance with DA Form 12-40, (qty rqr block no. 128) Organizational maintenance requirements for Rifles, Caliber .30: M1, M1C (Sniper's) and M1D (Sniper's).